



Description



Tunable white. IP67. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. LED circuit board with Tunable White Technology. DALI Interface . For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blackout and sealable junction box included in supply.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch <https://vimeo.com/672613058> here.

Weight	12.00 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-12/28W / 420 mA - 2200-6000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	32 W
Nominal Lumen (lm)	
LED Lumen	300
Total Lumen	3600
Tj	85
Rated lumens (lm)	
LED Lumen	209.3
Total Lumen	2511.9
Ta	25

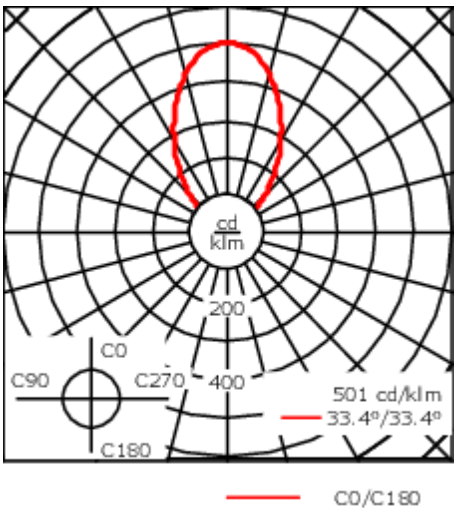

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<div><div></div>Stainless Steel</div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK10+

Electrical description

Driver / Ballast	Integral EC electronic converter with DALI Interface
------------------	--

Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. Warranty void if installed without proper drainage.
----------	--

185-7801

ETC340-GB TW LED



Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300



Optical Accessories


Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-7581	149



Surface wash lens

Description	Part ID	C1
Flood lens IO-360	185-7582	149



Linear louvre

Description	Part ID	C1
Linear louvre IL	185-9568	149

