





### Description

Tunable white. IP67. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. LED circuit board with Tunable White Technology. DALI Interface . For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

Weight	12.00 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-12/28W / 420 mA - 2200-6000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	32 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	300
Total Lumen	3600
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	209.3
Total Lumen	2511.9
T <sub>a</sub>	25

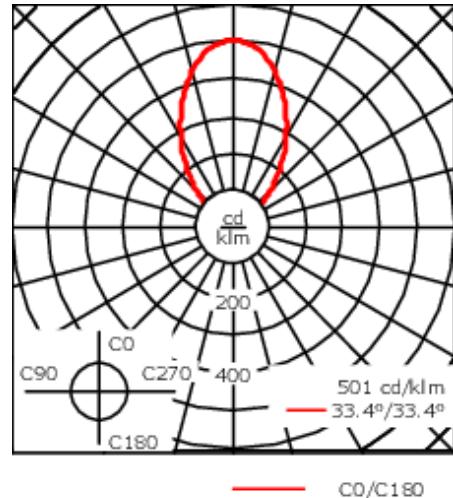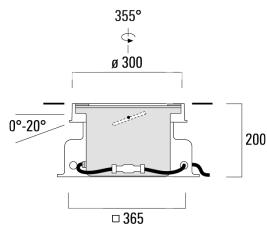

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<span style="background-color: #808080; display: inline-block; width: 15px; height: 15px; vertical-align: middle;"></span> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK10+

### Electrical description


Driver / Ballast	Integral EC electronic converter with DALI Interface
------------------	--

### Additional information

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300




C1

## Optical Accessories


### Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-7581	149



### Flood lens

Description	Part ID	C1
Flood lens IO-360	185-7582	149



**Linear louvre**

Description	Part ID	C1
Linear louvre LL	185-9568	149

**Honeycomb louvre**

Description	Part ID	C1
Honeycomb Louvre IW	185-2958	96

