

ETC330-FS TW LED

**Description**

Tunable white inground. IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 0.5 m of flexible PVC free cable.



Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC_R_ One LED Concept. LED circuit board with Tunable White Technology. DALI Interface . For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch **here.**

Weight	6.40 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-12/19W - 2200-6000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	23 W
Nominal Lumen (lm)	
LED Lumen	230
Total Lumen	2760
T _j	85
Rated lumens (lm)	
LED Lumen	167.7
Total Lumen	2012
T _a	25

ETC330-FS TW LED

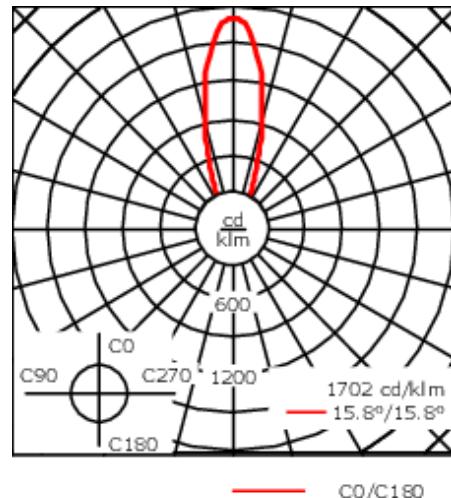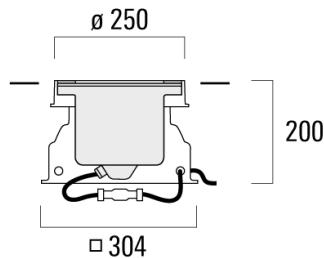

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK10+

Electrical description

Driver / Ballast	Integral EC electronic converter with DALI Interface
------------------	--

Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. Warranty void if installed without proper drainage.
----------	--

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0325	250




C1

Optical Accessories

Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7170	191



C1

Surface wash lens


Description	Part ID	C1
Flood lens IO-360	185-7171	191



C1

Wallwash lens

Description	Part ID	C1
IO-20-WW-ETC/EVC_30-FS-LED	185-8492	191



— C1 —
