

## ETC330-FS TW LED TUNABLE WHITE

**Description**

Tunable White.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. LED circuit board. Tunable White technology. Advanced thermal management protects LEDs while optimizing lumens output. LED boards can be easily removed for upgrading. 0-10V Dimming. For other control interface options to suit specific project requirements, contact WE-EF.

The concrete-pour installation blockout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black).

+ XXX-XXXX (Accessory 1)

Weight	22.0 lb
Light distribution	symmetric, medium beam [M]
Light source	LED-12/19W - 2200-6000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	23 W

**Nominal Lumen (lm)**

LED Lumen	230
Total Lumen	2760
Tj	85

**Delivered lumens (lm)**

LED Lumen	167.7
Total Lumen	2012
Ta	25

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030



customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 03/06/2026

185-7790

**we-ef**

**ETC330-FS TW LED TUNABLE WHITE**

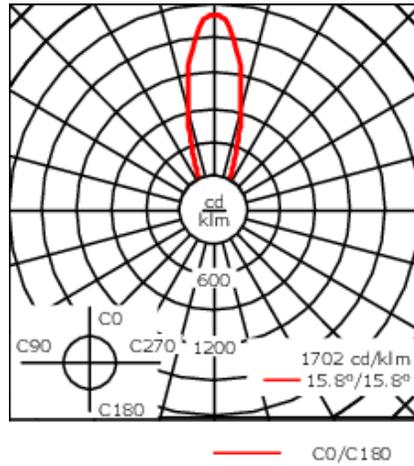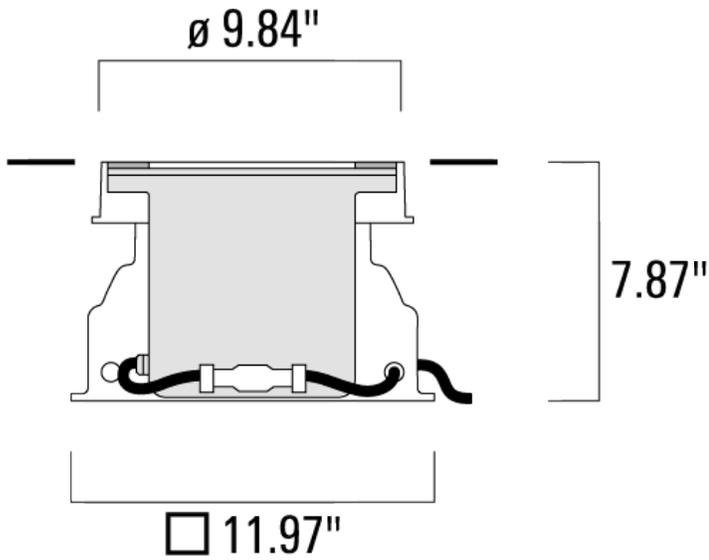

**ETC330-FS TW LED TUNABLE WHITE****Specifications****Material description**

Body	Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.
Lens	Safety glass lens, max. load 5 tonnes
Colors	 Stainless Steel
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK10+

**Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter with DALI Interface
Termination	Factory sealed termination chamber

**Additional information**

Lifetime	LED >60,000 h Ta 25°C (L70/B10) Control gear >50,000 h Ta 25°C
Listings	Contact WE-EF USA for ETL certification status.


## Optical Accessories

### Linear spread lens

---

Description	Part ID	C1
Linear spread lens IO-180	185-7170	7.52

---



**ETC330-FS TW LED TUNABLE WHITE**


---

**Softening Lens**

---

Description	Part ID	C1
Flood lens IO-360	185-7171	6.30

---



---

**Linear louvre**

---

Description	Part ID	C1
Linear louvre IL	185-7172	7.52

---



**ETC330-FS TW LED TUNABLE WHITE**


---

**Honeycomb louvre**

---

Description	Part ID	C1
Honeycomb Louvre IW	185-7180	7.53

---



---

**Wallwash lens**

---

Description	Part ID	C1
IO-20-WW-ETC/EVC_30-FS-LED	134-1492	7.52

---

