





Description

Tunable white. IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. LED circuit board with Tunable White Technology. DALI Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Luminaire installation blockout and sealable junction box included in supply.

Weight	6.40 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-12/19W - 2200-6000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	23 W
Nominal Lumen (lm)	
LED Lumen	230
Total Lumen	2760
T _j	85
Rated lumens (lm)	
LED Lumen	167.7
Total Lumen	2012
T _a	25

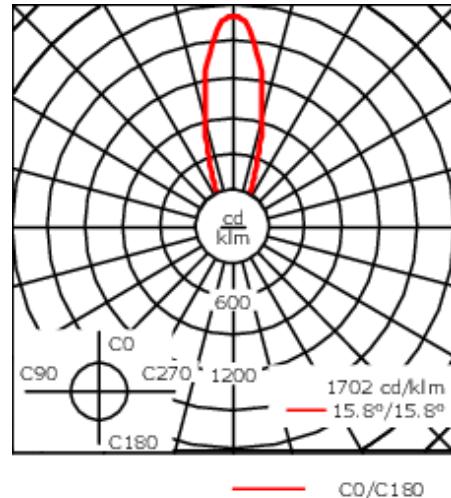

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP69
Impact resistance	IK10+

Electrical description

Driver / Ballast	Integral EC electronic converter with DALI Interface
------------------	--

Additional information

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0325	250




C1

Optical Accessories

Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7170	191



C1

Flood lens

Description	Part ID	C1
Flood lens IO-360	185-7171	191



C1


EVC330-FS TW LED

Linear louvre

Description	Part ID	C1
Linear louvre LL	185-7172	191

**Honeycomb louvre**

Description	Part ID	C1
Honeycomb Louvre IW	185-7180	191



Wallwash lens

Description	Part ID	C1
Wallwash lens I0-20	134-1492	191

