



Description


IP66, Class I. IK07. Surface mounted LED wall luminaire. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming on request. Suitable for installation over 4" recessed junction box. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

ADA (American Disabilities Act) Compliant.

|                    |   |
|--------------------|---|
| Weight             | 4.20 lb                                       |
| Light distribution | medium beam up and forward throw down [M/R45] |
| Light source       | LED-2x3/18W / 1050mA - 3000 K                 |
| CRI                | 80  |
| Power supply       | electronic gear                               |
| BUG                | B0 U0 G0 Down Only                            |
| LEDs               | 6   |
| Rated input power  | 22 W  |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 430  |
| Total Lumen        | 2580 |
| Tj                 | 85   |

|                       |        |
|-----------------------|--------|
| Delivered lumens (lm) |        |
| LED Lumen             | 291.3  |
| Total Lumen           | 1747.9 |
| Ta                    | 25     |

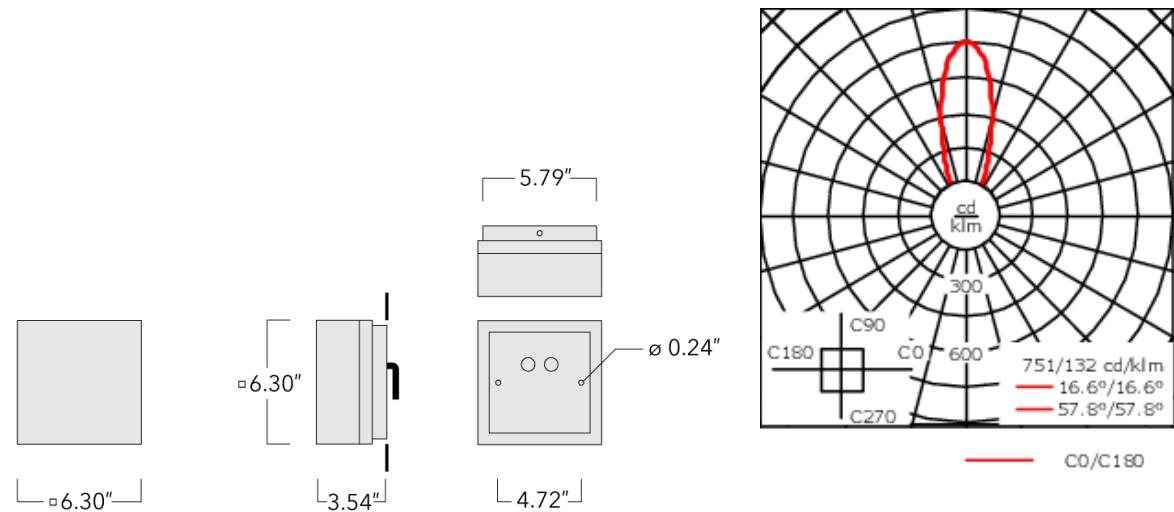

Specifications

Material description

|                      |   |
|----------------------|---|
| Body                 | Luminaire body and lens frame constructed in die cast aluminum.   |
| Lens                 | Clear tempered glass lens.  |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket   |
| Fasteners            | PCS polymer coated stainless steel  |
| Ingress protection   | IP66  |
| Impact resistance    | IK07  |
| Corrosion resistance | 5CE   |

Electrical description

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |

Additional information

|            |   |
|------------|---|
| Lifetime   | Ta=25°/40° L90B10 > 90000h  |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings   | ETL listed. Suitable for wet locations.   |

Mounting Accessories

Surface Collar

| Description           | Part ID  | A   | B   | C1   | D1 | D2 | D3    | M1 | M2 |
|-----------------------|----------|-----|-----|------|----|----|-------|----|----|
| QLS410 Surface Collar | 131-6000 | 6.3 | 6.3 | 1.75 | ø1 | ø2 | ø0.38 | 5  | 5  |