



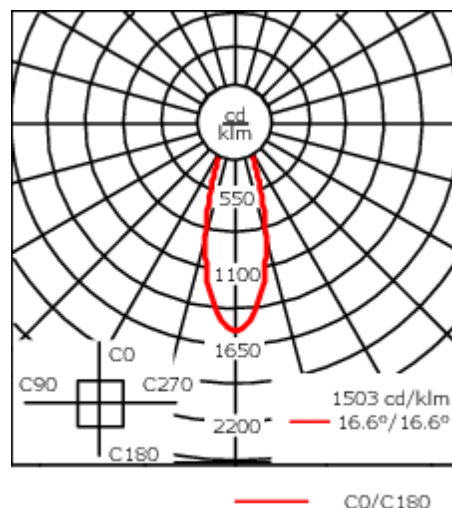

Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 1-10V or DALI interface on request. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Weight	1.90 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-3/13W / 1400 mA - 3000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	15.8 W
Nominal Lumen (lm)	
LED Lumen	550
Total Lumen	1650
Tj	85
Rated lumens (lm)	
LED Lumen	370.7
Total Lumen	1112.2
Ta	25

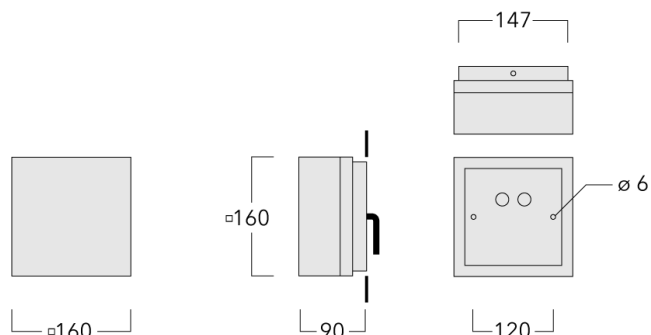

Specifications

Material description

Body	Marine-grade die-cast aluminium alloy										
Lens	Safety glass lens										
Colours	<table><tr><td></td><td>RAL9004 Signal black</td></tr><tr><td></td><td>RAL9006 White aluminium</td></tr><tr><td></td><td>RAL9007 Grey aluminium</td></tr><tr><td></td><td>RAL7016 Anthracite grey</td></tr><tr><td></td><td>RAL9016 Traffic white</td></tr></table>		RAL9004 Signal black		RAL9006 White aluminium		RAL9007 Grey aluminium		RAL7016 Anthracite grey		RAL9016 Traffic white
	RAL9004 Signal black										
	RAL9006 White aluminium										
	RAL9007 Grey aluminium										
	RAL7016 Anthracite grey										
	RAL9016 Traffic white										
Gasket	Silicone CCG® Controlled Compression Gasket										
Fasteners	PCS Polymer Coated Stainless Steel Hardware										
Ingress protection	IP66										
Impact resistance	IK07										
Corrosion resistance	5CE										

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV

Additional information

Lifetime	Ta=25° L90B10 > 90000h
Energy efficiency class	C-D (Light source)

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0

info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024