





Description

IP66. Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Luminaire can be mounted for up or down lighting. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Weight	3.30 kg
Light distribution	symmetric, narrow beam up and medium beam down [E/M]
Light source	LED-2x3/26W / 1400mA - 3000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	550
Total Lumen	3300
T _j	85
Rated lumens (lm)	
LED Lumen	393.1
Total Lumen	2358.7
T _a	25

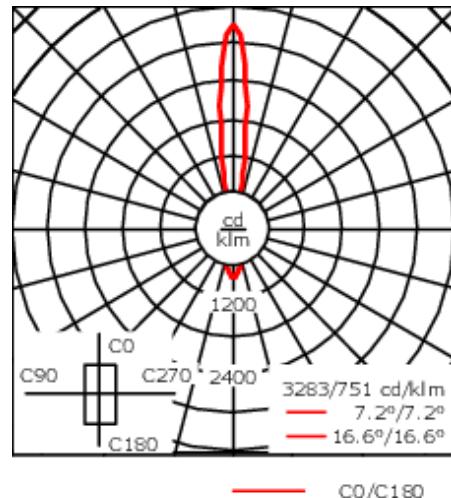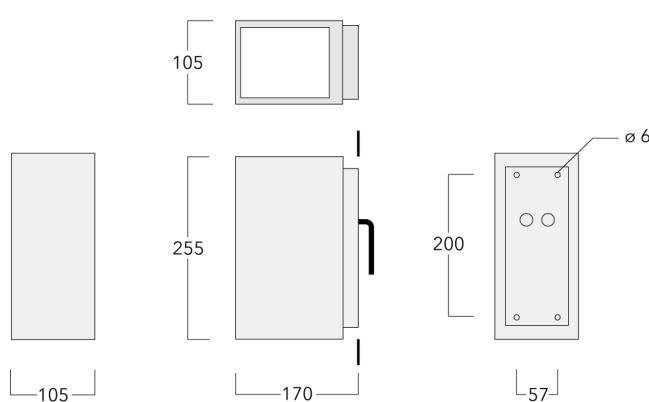

Specifications

Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium

RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66

Impact resistance IK07

Corrosion resistance 5CE+Primer

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

Additional information


Lifetime $T_a=40^\circ L90B10 > 90000h$

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Mounting Accessories

Column fitter

Description	Part ID	C1	D1	H1	H2	M1	Weight (kg)
CF-410/420	131-9140	83	≥ 140	220	100	6	0.60

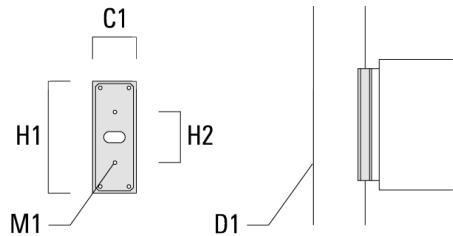

Control

1-10 V analogue dimming interface

Description	Part ID	C
1-10 V analogue dimming interface	430-0011	90