



Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)


|                    |                                                          |
|--------------------|----------------------------------------------------------|
| Weight             | 7.20 lb                                                  |
| Light distribution | symmetric, narrow beam up and forward-throw down [N/A60] |
| Light source       | LED-2x3/26W / 1400mA - 4000 K                            |
| CRI                | 80                                                       |
| Power supply       | electronic gear                                          |
| BUG                | B0 U0 G0 Down Only                                       |
| LEDs               | 6                                                        |
| Rated input power  | 27 W                                                     |

Nominal Lumen (lm)

|             |      |
|-------------|------|
| LED Lumen   | 575  |
| Total Lumen | 3450 |
| Tj          | 85   |

Delivered lumens (lm)

|             |        |
|-------------|--------|
| LED Lumen   | 303.3  |
| Total Lumen | 1819.7 |
| Ta          | 25     |

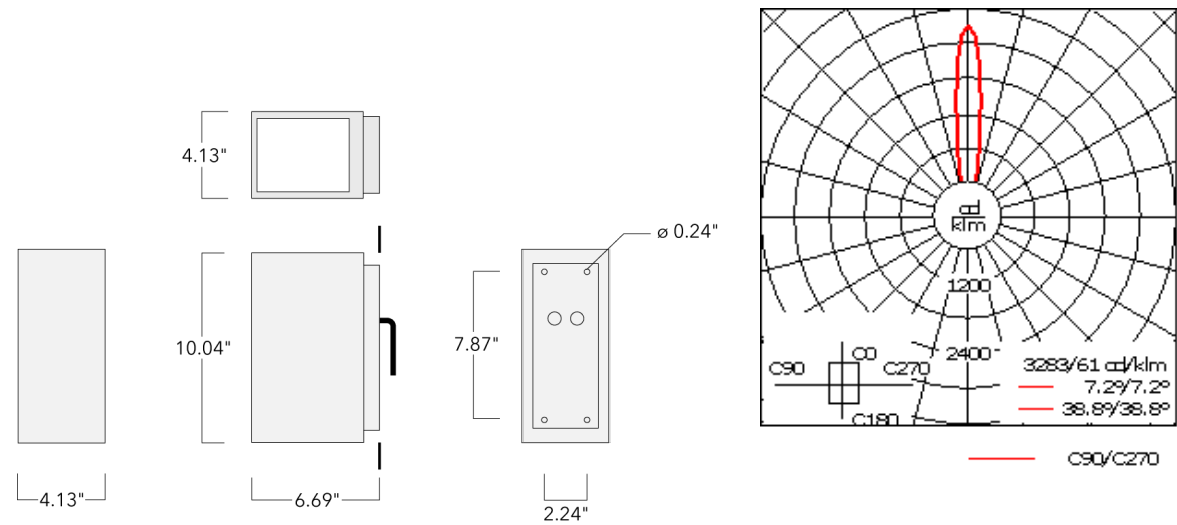

Specifications

Material description

|                      |                                                                                                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Luminaire body and lens frame constructed in die cast aluminum.                                                                                                   |
| Lens                 | Clear tempered glass lens.                                                                                                                                        |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone rubber gasket                                                                                                                                            |
| Fasteners            | PCS polymer coated stainless steel                                                                                                                                |
| Ingress protection   | IP66                                                                                                                                                              |
| Impact resistance    | IK08                                                                                                                                                              |
| Corrosion resistance | 5CE                                                                                                                                                               |

Electrical description

|                  |                                                                                         |
|------------------|-----------------------------------------------------------------------------------------|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter                                                        |


Additional information

|            |                                                                                       |
|------------|---------------------------------------------------------------------------------------|
| Lifetime   | Ta=25°/40° L90B10 > 90000h                                                            |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings   | ETL listed. Suitable for wet locations.                                               |

Mounting Accessories

Column fitter

| Description | Part ID  | C1   | D1     | H1   | H2   | M1   | Weight (lb) |
|-------------|----------|------|--------|------|------|------|-------------|
| CF-410/420  | 131-9140 | 3.27 | ≥ 5.51 | 8.66 | 3.94 | 0.24 | 1.32        |

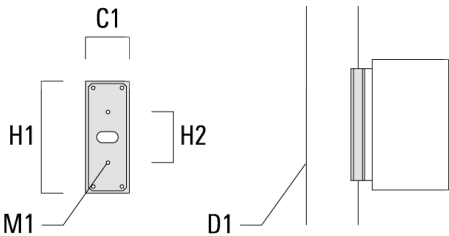

Surface Collar

| Description            | Part ID  | A    | B    | C1   | D1 | D2   | D3    | M1 | M2 |
|------------------------|----------|------|------|------|----|------|-------|----|----|
| VLS/SLS Surface Collar | 131-6004 | 8.66 | 3.66 | 1.75 | ø1 | ø1.5 | ø0.38 | 6  | 2  |

