

**Description**

Surface-mounted wall luminaire.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.


Suitable for Up, Down, or Up/Down light distribution. Supplied with wall plate to fit over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	7.34 lb
Light distribution	symmetric, narrow beam up and medium beam down [N/M]
Light source	LED-2x3/18W / 1050mA - 3000 K
CRI	80
Power supply	electronic gear
BUG	B1 U0 G0 Down Only
LEDs	6
Rated input power	22 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	430
Total Lumen	2580
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	307.3
Total Lumen	1844
T <sub>a</sub>	25

## SLS410 LED

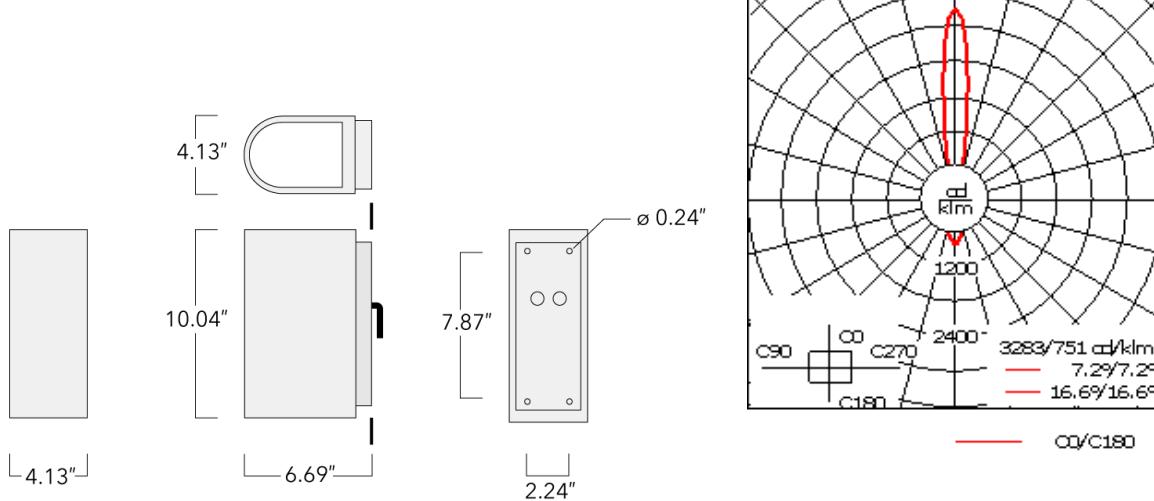

## Specifications

## Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span>  RAL9004 Black       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #999; border-radius: 50%;"></span>  RAL9007 Grey Metallic       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #f0f0f0; border-radius: 50%;"></span>  RAL9016 White       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: darkgray; border-radius: 50%;"></span>  RAL8019 Dark Bronze       </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

## Electrical description

Power supply	Integral [ECG] electronic 0-10 V dimmable driver in 120-277 universal voltage.
Driver / Ballast	Integral EC electronic converter

**Additional information**

---


Lifetime	Ta=25°/40° L90B10 > 90000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare.
Listings	ETL listed. Suitable for wet locations.

---

## Mounting Accessories

### Column fitter

Description	Part ID	C1	D1	H1	H2	M1	Weight (lb)
CF-410/420	131-9140	3.27	$\geq 5.51$	8.66	3.94	0.24	1.32

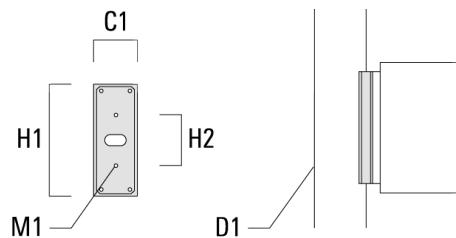

## SLS410 LED

## Surface Collar

Description	Part ID	A	B	C1	D1	D2	D3	M1	M2
VLS/SLS Surface Collar	131-6004	8.66	3.66	1.75	ø1	ø1.5	ø0.38	6	2

