#### SLS410 LED





#### **Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation.


Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.


Luminaire can be mounted for up or down lighting. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Weight	3.30 kg
Light distribution	symmetric, medium beam up and forward throw down [M/ A60]
Light source	LED-2x3/18W / 1050mA - 3000 K
CRI	80
Power supply	EC
BUG	B0 U0 G0 Down Only
LEDs	6
Rated input power	22 W
Nominal Lumen (lm)	
LED Lumen	430
Total Lumen	2580
Tj	85
Rated lumens (lm)	
LED Lumen	209.4
Total Lumen	1256.2
Та	25

#### SLS410 LED



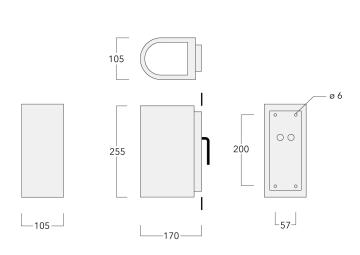



# **Specifications Material description**

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK07

Corrosion resistance 5CE+Primer

# **Electrical description**

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

#### **Additional information**

Lifetime	$Ta=40^{\circ} L90B10 > 90000h$
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

#### **WE-EF LIGHTING Pty Ltd**

## 131-9862

#### **SLS410 LED**



### **Control**

# 1-10 V analogue dimming interface

Description	С
10 V analogue dimming interface	90

# 131-9862

#### **SLS410 LED**



# **Mounting Accessories**

## **Column fitter**

Description	Part ID	C1	D1	H1	H2	M1	Weight (kg)
CF-410/420	131-9140	83	≥ 140	220	100	6	0.60

