



Description

Surface-mounted wall luminaire.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.


Suitable for Up, Down, or Up/Down light distribution. Supplied with wall plate to fit over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.  
Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

|                    |                              |
|--------------------|------------------------------|
| Weight             | 7.70 lb                      |
| Light distribution | symmetric, narrow beam [N]   |
| Light source       | LED-3/13W / 1400 mA - 4000 K |
| CRI                | 80                           |
| Power supply       | electronic gear              |
| BUG                | B2 U0 G0                     |
| LEDs               | 3                            |
| Rated input power  | 14 W                         |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 575  |
| Total Lumen        | 1725 |
| Tj                 | 85   |

|                       |        |
|-----------------------|--------|
| Delivered lumens (lm) |        |
| LED Lumen             | 434.2  |
| Total Lumen           | 1302.5 |
| Ta                    | 25     |

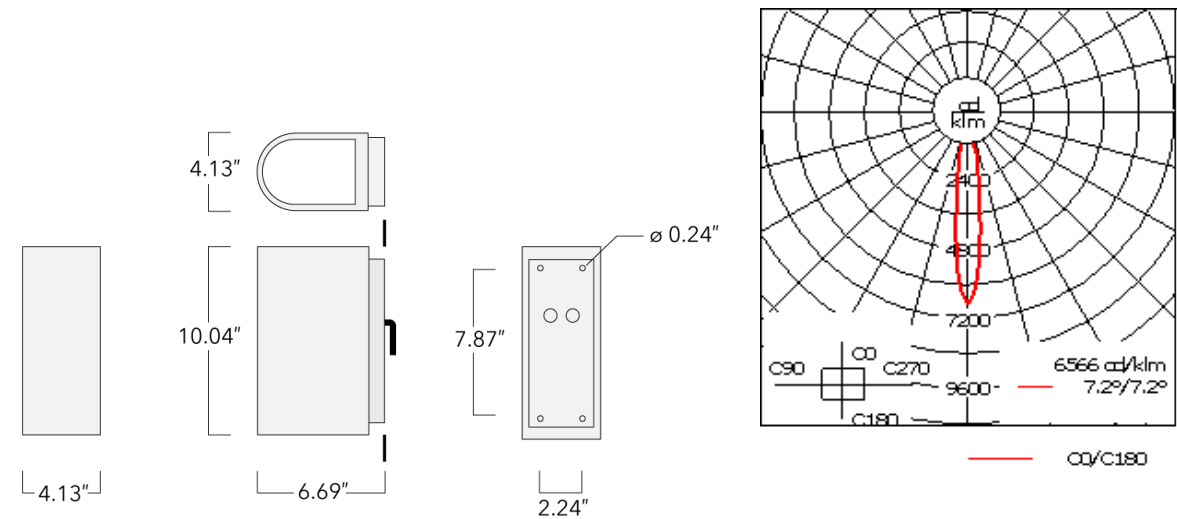


**Additional information**

|            |                                                                                       |
|------------|---------------------------------------------------------------------------------------|
| Lifetime   | Ta=25°/40° L90B10 > 90000h                                                            |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings   | ETL listed. Suitable for wet locations.                                               |

Mounting Accessories

Column fitter

| Description | Part ID  | C1   | D1     | H1   | H2   | M1   | Weight (lb) |
|-------------|----------|------|--------|------|------|------|-------------|
| CF-410/420  | 131-9140 | 3.27 | ≥ 5.51 | 8.66 | 3.94 | 0.24 | 1.32        |

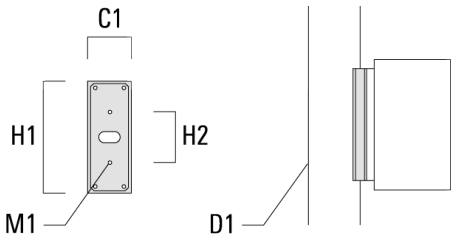

Surface Collar

| Description            | Part ID  | A    | B    | C1   | D1 | D2   | D3    | M1 | M2 |
|------------------------|----------|------|------|------|----|------|-------|----|----|
| VLS/SLS Surface Collar | 131-6004 | 8.66 | 3.66 | 1.75 | ø1 | ø1.5 | ø0.38 | 6  | 2  |

