





Description

IP66. Class I. Class II on request. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Luminaire can be mounted for up or down lighting.

|                    |                               |
|--------------------|-------------------------------|
| Weight             | 5.20 kg                       |
| Light distribution | asymmetric, side throw [S70]  |
| Light source       | LED-12/52W / 1400 mA - 2700 K |
| CRI                | 80                            |
| Power supply       | EC                            |
| BUG                | B1 U0 G1                      |
| LEDs               | 12                            |
| Rated input power  | 53 W                          |
| Nominal Lumen (lm) |                               |
| LED Lumen          | 520                           |
| Total Lumen        | 6240                          |
| Tj                 | 85                            |
| Rated lumens (lm)  |                               |
| LED Lumen          | 302.3                         |
| Total Lumen        | 3627.7                        |
| Ta                 | 25                            |

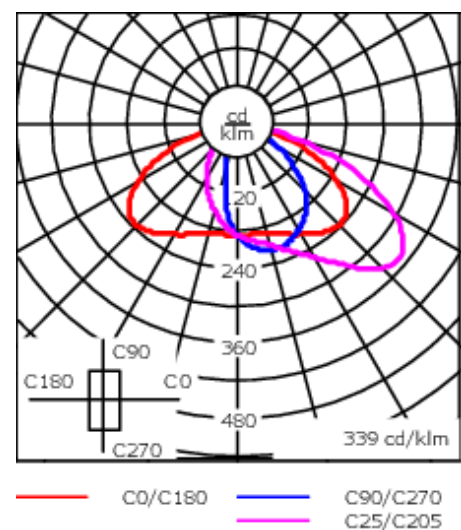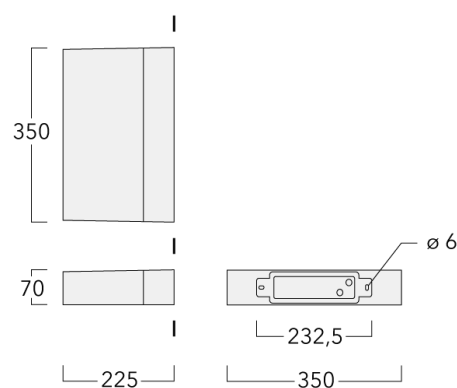

Specifications  
Material description

|                      |                                                                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, die-cast aluminium alloy                                                                                                                                                                                               |
| Lens                 | Safety glass lens                                                                                                                                                                                                                    |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket                                                                                                                                                                                          |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware                                                                                                                                                                                          |
| Ingress protection   | IP66                                                                                                                                                                                                                                 |
| Impact resistance    | IK08                                                                                                                                                                                                                                 |
| Corrosion resistance | 5CE                                                                                                                                                                                                                                  |

Electrical description

|                  |                                                                                 |
|------------------|---------------------------------------------------------------------------------|
| Power supply     | 220-240V / 50-60 Hz                                                             |
| Driver / Ballast | Standard. Optional DALI version available. To be specified at time of ordering. |
| Power factor     | > 0.9                                                                           |
| Surge protection | 1/2 kV                                                                          |


Additional information

|                         |                        |
|-------------------------|------------------------|
| Lifetime                | Ta=25° L90B10 > 90000h |
| Energy efficiency class | C-D (Light source)     |

Optical Accessories

Honeycomb louvre

| Description | Part ID  | C1  | H1 |
|-------------|----------|-----|----|
| IW-PLS430   | 131-9684 | 308 | 71 |

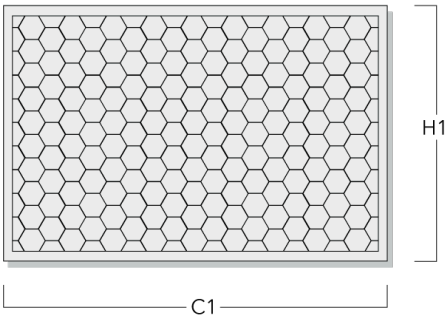

Light shield

| Description | Part ID  | Additional information                                                                                                                                                                          |
|-------------|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LS180-[A60] | 430-0038 | Light shield LS180 to greatly reduce or eliminate light pollution.<br>PA injection moulded component, black matt.<br>Suitable for asymmetric light distribution [A60].                          |
| LS180       | 430-0029 | Glare Shield for backlight spill. Glare Shield factory-installed or available as retrofit kit.<br>Suitable for [S60], [S65], [S70], [R65], [P65] lenses. Must be specified at time of ordering. |

Control

DALI interface

| Description    | Part ID  | Additional information                                                                                                                                                                                                                                                                                                                                                                                       | C  |
|----------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| DALI interface | 430-0013 | DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0).<br><br>Dali 2.0<br>-Application controllers and Input devices defined<br>-Single-masters and multi-masters allowed<br>-Event priorities defined<br>-Separate addressing & grouping from control gear<br><br>Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed! | 90 |