

## ETV124 LED COLUMN GRAZER

**Description**

Column Grazer.

IP69K. Class I. IK08. Marine-grade, all aluminum construction. Anodized aluminum extrusion. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max static load, 3.3 tons (6,600 lbs) (according to DIN EN 60598-2-13). Luminaires can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tires, at a weight up to 5.5 tons (11,000 lbs) per wheel. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Linear PMMA LED lens. Integral driver with 0-10V Dimming. Integral driver in thermally separated compartment. Factory-installed LED circuit board. LED board can be easily removed for upgrading. 0-10V Dimming. Luminaires are factory-sealed and does not need to be opened during installation.

The installation blockout to be ordered separately; block-outs can house between 1-4 luminaires.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Weight	10.14 lb
Light distribution	asymmetric, wallgrazer [A6]
Light source	LED-32/20W / 225 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	32
Rated input power	23.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	90
Total Lumen	2880
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	68.5
Total Lumen	2191.4
T <sub>a</sub>	25



**ETV124 LED COLUMN GRAZER**

---

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

## ETV124 LED COLUMN GRAZER

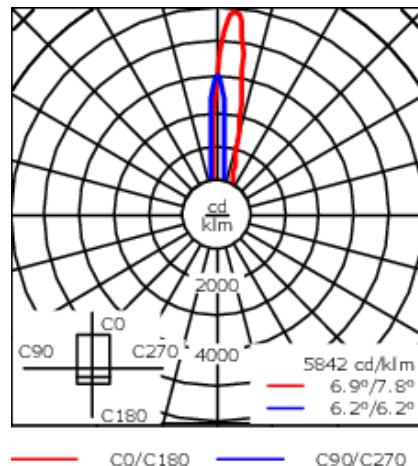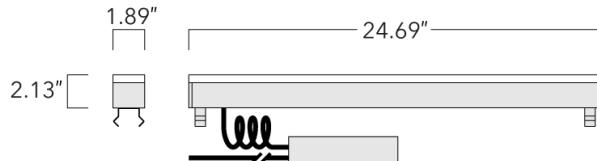**Specifications****Material description**

Body	Marine-grade all aluminium construction. Anodized aluminium extrusion
Lens	Safety glass lens; max. load 3 tonnes
Colors	
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK08

**Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Electronic converter with 0-10V interface
Power factor	> 0.9

**Additional information**


Lifetime	Ta=25°/40° L90B10 > 90000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

## ETV124 LED COLUMN GRAZER

## Electrical Accessories

## Sealable junction box


Description	Part ID	C1	M1	M2
Sealable junction box SJB 130	185-1624	5.75	$\varnothing$ 0.39	$\varnothing$ 0.47 - 0.75

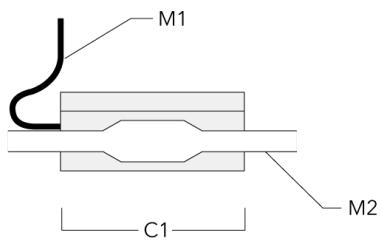

## ETV124 LED COLUMN GRAZER

**Optical Accessories****Honeycomb louvre**

Description	Part ID	C1	H1
IW for ETV120	186-0294	598	30

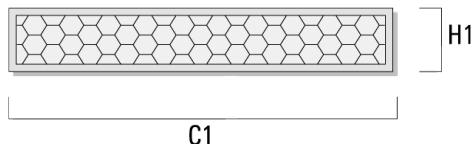


## ETV124 LED COLUMN GRAZER


## Mounting Accessories

## Installation breakout, Type I

Description	Part ID	A	C1	D1	D2	Weight (lb)
BEV120-I-1/627 (1 luminaire)	186-0306	26.58	6.30	2.13	4.72	7.48 lbs

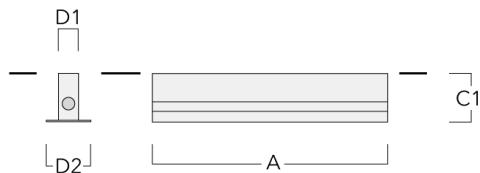


BEV120-I-2/627 (2 luminaires)	186-0307	51.34	6.30	2.13	4.72	13.79
-------------------------------	----------	-------	------	------	------	-------

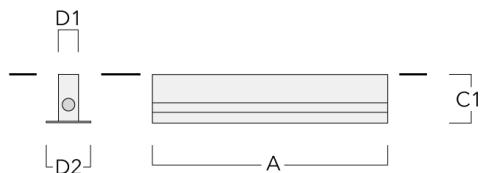

## ETV124 LED COLUMN GRAZER

Description	Part ID	A	C1	D1	D2	Weight (lb)
BEV120-I-3/627 (3 luminaires)	186-0308	76.1	6.30	2.13	4.72	20.11

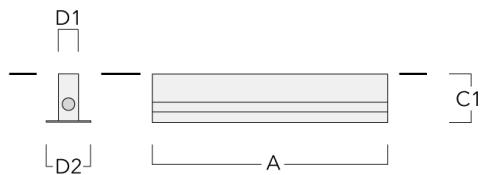

BEV120-I-4/627 (4 luminaires)	186-0309	100.87	6.30	2.13	4.72	26.46
-------------------------------	----------	--------	------	------	------	-------

