

FLC121 LED - Wall bracket



**Description**

IP55, Class I. IK07. Marine-grade, all-aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Two cable entries.

Knuckle permits 350° horizontal and 180° vertical aiming of optics.

| | |
|---------------------------|-----------------------------|
| Weight | 2.90 kg |
| Light distribution | wallwash |
| Light source | LED-6/12W / 700 mA - 2700 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 6 |
| Rated input power | 14.5 W |
| Nominal Lumen (lm) | |
| LED Lumen | 270 |
| Total Lumen | 1620 |
| T _j | 85 |
| Rated lumens (lm) | |
| LED Lumen | 188.2 |
| Total Lumen | 1129.3 |
| T _a | 25 |

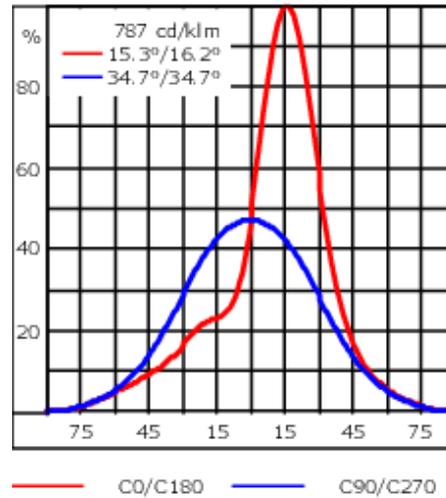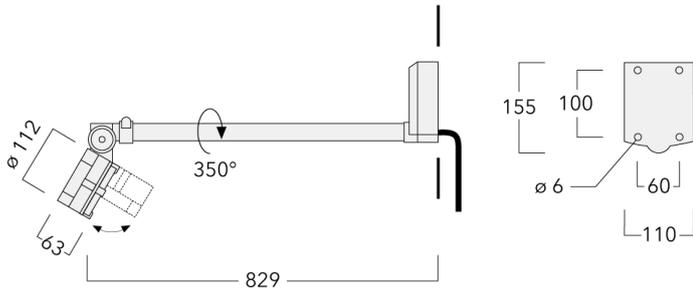

Specifications

Material description

| | |
|----------------------|--|
| Body | Marine-grade, die-cast aluminium alloy |
| Lens | Safety glass lens |
| Colours | <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> RAL9004 Signal black </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #cccccc; margin-right: 5px;"></div> RAL9006 White aluminium </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> RAL9007 Grey aluminium </div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP55 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE+Primer |

Electrical description

| | |
|------------------|---|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |


Additional information

| | |
|----------|--|
| Lifetime | Ta=40° L90B10 > 90000h |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |

Optical Accessories


Snoot

| Description | Part ID | A | C1 |
|-------------|----------|----|-----|
| Snoot ET | 145-0030 | 60 | 120 |



Linear spread lens


| Description | Part ID | C1 |
|-------------------|----------|----|
| IO-180-FLC121-LED | 145-0050 | 81 |



FLC121 LED - Wall bracket


Surface wash lens

| Description | Part ID | C1 |
|-------------------|----------|----|
| IO-360-FLC121-LED | 145-9390 | 81 |



Honeycomb louvre


| Description | Part ID | C1 |
|---------------|----------|----|
| IW-FLC121-LED | 145-0143 | 81 |



FLC121 LED - Wall bracket


Wallwash lens

| Description | Part ID | C1 |
|---------------------|----------|----|
| IO-20-WW-FLC121-LED | 145-0145 | 81 |



Glare shield

| Description | Part ID | A | C1 |
|-----------------|----------|-----|-----|
| Glare shield ES | 145-9192 | 102 | 119 |



Linear louvre

| Description | Part ID | C1 |
|------------------|----------|----|
| Linear louvre IL | 145-9171 | 81 |

