

FLC131 LED - Wall bracket

**Description**

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Knuckle permits 350° horizontal and 90° vertical aiming of optics.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black).

+ XXX-XXXX (Accessory 1)

Weight	9.90 lb
Light distribution	linear spread, very narrow beam, 'sharp cut-off'
Light source	LED-12/24W / 700 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W



Nominal Lumen (lm)

LED Lumen	270
Total Lumen	3240
T _j	85

Delivered lumens (lm)

LED Lumen	222.4
Total Lumen	2668.2
T _a	25

FLC131 LED - Wall bracket

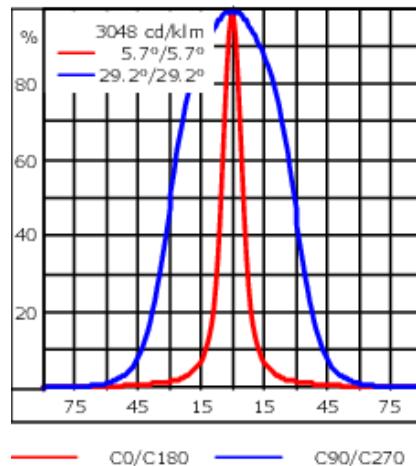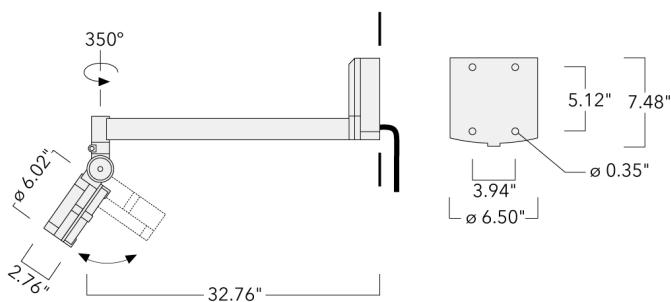**Specifications****Material description**

Body Marine-grade die-cast aluminium alloy

Lens Clear tempered glass lens

Colors

RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel hardware

Ingress protection IP55

Impact resistance IK07

Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter in thermally-separated compartment

Surge protection Integral 10kV Surge Protector

Additional information

Lifetime $T_a=25^\circ/40^\circ$ L90B10 > 90000h


Listings ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.

FLC131 LED - Wall bracket

Optical Accessories

Glare shield


Description	Part ID	A	C1
Glare shield ES	146-0156	4.33	3.94



FLC131 LED - Wall bracket


Snoot

Description	Part ID	A	C1
Snoot ET	146-0397	3.76	4.96



Softening Lens


Description	Part ID	C1
IO-360	146-0623	4.33"



FLC131 LED - Wall bracket


Linear spread lens

Description	Part ID	C1
IO-180-FLC131-LED	146-0418	4.30



Wallwash lens

Description	Part ID	C1
IO-20-WW-FLC131-LED	146-0645	4.33



FLC131 LED - Wall bracket**Honeycomb louvre**

Description	Part ID	C1
IW-FLC131-LED	146-0625	4.33

