

127-1419

AOP534 LED-FT

**we-ef**



#### Description

IP55, Class I. IK10. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gaskets. Polycarbonate main lens. CAD-optimised indirect optics for superior illumination and glare control.

Brackets to be ordered separately.

|                           |                              |
|---------------------------|------------------------------|
| Weight                    | 7.60 kg                      |
| Light distribution        | symmetric distribution [C60] |
| Light source              | LED-FT-17W / 500 mA - 2700 K |
| CRI                       | 80                           |
| Power supply              | EC                           |
| LEDs                      | 1                            |
| Rated input power         | 20 W                         |
| <b>Rated lumens (lm)</b>  |                              |
| LED Lumen                 | 2006.8                       |
| Total Lumen               | 2006.8                       |
| Ta                        | 25                           |
| <b>Nominal Lumen (lm)</b> |                              |
| LED Lumen                 | 2935                         |
| Total Lumen               | 2935                         |
| Tc                        | 25                           |

#### WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499


info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

127-1419




AOP534 LED-FT

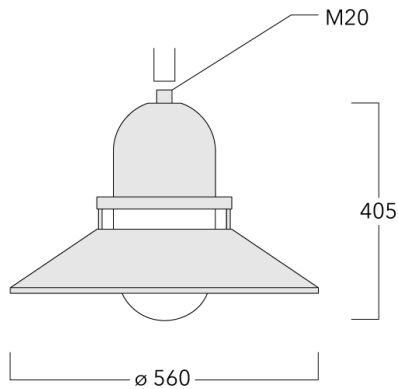**we-ef**



## Specifications

### Material description

|                      |                                                                                                                                                                                                                                                                                                                                       |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade, die-cast aluminium alloy                                                                                                                                                                                                                                                                                                |
| Lens                 | Polycarbonate lens                                                                                                                                                                                                                                                                                                                    |
| Colours              |  RAL9004 Signal black<br> RAL9006 White aluminium<br> RAL9007 Grey aluminium |
| Gasket               | Silicone rubber gasket                                                                                                                                                                                                                                                                                                                |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware                                                                                                                                                                                                                                                                                           |
| Ingress protection   | IP55                                                                                                                                                                                                                                                                                                                                  |
| Impact resistance    | IK10                                                                                                                                                                                                                                                                                                                                  |
| Corrosion resistance | 5CE+Primer                                                                                                                                                                                                                                                                                                                            |
| Windage              | 0.12 m <sup>2</sup>                                                                                                                                                                                                                                                                                                                   |

### Electrical description

|                  |                                                                                                                                                          |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply     | 220-240V / 50-60 Hz                                                                                                                                      |
| Driver / Ballast | Integral EC electronic converter                                                                                                                         |
| Power factor     | > 0.9                                                                                                                                                    |
| Surge protection | In-pole surge protection SP10 device supplied. Please refer to WE-EF installation instructions for details. Use suffix +A for Integral surge protection. |

### Additional information

|          |                        |
|----------|------------------------|
| Lifetime | Ta=40° L70B50 > 50000h |
|----------|------------------------|

#### WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024

**127-1419**

**AOP534 LED-FT**

**we-ef**

**Control**

**Eco Step Dim® Basic**

| Description             | Part ID  |
|-------------------------|----------|
| Eco Step Dim® Basic LED | 430-0001 |

**Eco Step Dim® Advanced**

| Description                | Part ID  |
|----------------------------|----------|
| Eco Step Dim® Advanced LED | 430-0002 |

**WE-EF LIGHTING Pty Ltd**

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499


info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/11/2024


**Mounting Accessories**

**Wall and pole brackets BA**

| Description                  | Part ID  | C1  | D x L1 | H1   | H2  | M1 | Weight (kg) | C   | H    |
|------------------------------|----------|-----|--------|------|-----|----|-------------|-----|------|
| BA0-420 Wall bracket, single | 300-0152 | 460 |        | 1000 | 132 | 9  | 2           | 460 | 1000 |




|                              |          |     |         |      |  |  |   |     |      |
|------------------------------|----------|-----|---------|------|--|--|---|-----|------|
| BA1-420 Pole bracket, single | 300-0099 | 420 | 76 x 80 | 1000 |  |  | 4 | 420 | 1000 |
|------------------------------|----------|-----|---------|------|--|--|---|-----|------|




**AOP534 LED-FT**

| Description                  | Part ID  | C1  | D x L1  | H1   | H2 | M1 | Weight (kg) | C   | H    |
|------------------------------|----------|-----|---------|------|----|----|-------------|-----|------|
| BA2-420 Pole bracket, double | 300-0104 | 500 | 76 x 80 | 1000 |    |    | 8           | 500 | 1000 |

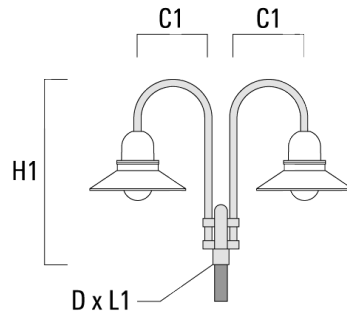


|                              |          |     |         |      |  |  |    |     |      |
|------------------------------|----------|-----|---------|------|--|--|----|-----|------|
| BA3-420 Pole bracket, triple | 300-0109 | 500 | 76 x 80 | 1000 |  |  | 10 | 500 | 1000 |
|------------------------------|----------|-----|---------|------|--|--|----|-----|------|




**AOP534 LED-FT**

**Wall and pole brackets BC**

| Description                  | Part ID  | C1  | H1   | H2  | M1 | Weight (kg) | C   | H    |
|------------------------------|----------|-----|------|-----|----|-------------|-----|------|
| BC0-420 Wall bracket, single | 300-0808 | 460 | 1230 | 300 | 8  | 2.30        | 460 | 1230 |




|                              |          |     |      |     |   |      |     |      |
|------------------------------|----------|-----|------|-----|---|------|-----|------|
| BC1-420 Pole bracket, single | 300-0768 | 500 | 1230 | 300 | 8 | 2.30 | 500 | 1230 |
|------------------------------|----------|-----|------|-----|---|------|-----|------|




**AOP534 LED-FT**

| Description                  | Part ID  | C1  | H1   | H2  | M1 | Weight (kg) | C   | H    |
|------------------------------|----------|-----|------|-----|----|-------------|-----|------|
| BC2-420 Pole bracket, double | 300-0767 | 500 | 1230 | 300 | 8  | 4.60        | 500 | 1230 |

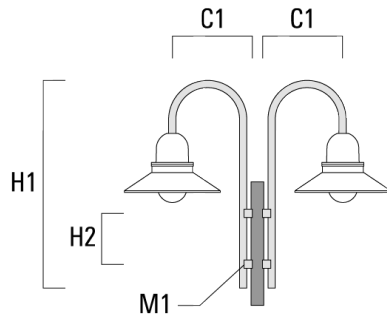


**Wall and pole brackets DA**

| Description                  | Part ID  | C1  | C2 | D × L1 | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|--------|-----|-------------|-----|-----|
| DA0-500 Wall bracket, single | 300-0146 | 510 | 70 |        | 650 | 5.70        | 510 | 650 |

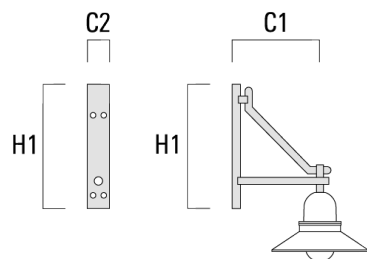


**AOP534 LED-FT**

| Description                  | Part ID  | C1  | C2 | D x L1  | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|---------|-----|-------------|-----|-----|
| DA1-500 Pole bracket, single | 300-0138 | 510 |    | 76 x 80 | 700 | 5.70        | 510 | 700 |




|                              |          |     |  |         |     |      |     |     |
|------------------------------|----------|-----|--|---------|-----|------|-----|-----|
| DA2-500 Pole bracket, double | 300-0141 | 510 |  | 76 x 80 | 700 | 8.30 | 510 | 700 |
|------------------------------|----------|-----|--|---------|-----|------|-----|-----|






**AOP534 LED-FT**

| Description                  | Part ID  | C1  | C2 | D × L1  | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|---------|-----|-------------|-----|-----|
| DA3-500 Pole bracket, triple | 300-0144 | 510 |    | 76 x 80 | 700 | 10.90       | 510 | 700 |

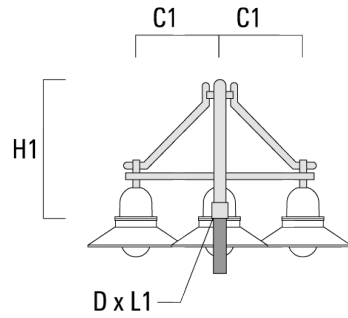


**Wall and pole brackets DB**

| Description                  | Part ID  | C1  | C2 | D × L1 | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|--------|-----|-------------|-----|-----|
| DB0-500 Wall bracket, single | 300-0169 | 510 | 70 |        | 650 | 5.50        | 510 | 650 |

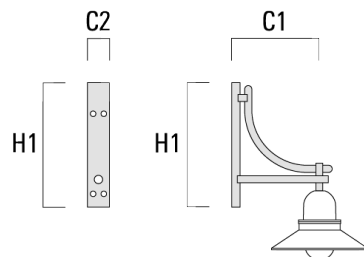


**AOP534 LED-FT**

| Description                  | Part ID  | C1  | C2 | D x L1  | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|---------|-----|-------------|-----|-----|
| DB1-500 Pole bracket, single | 300-0190 | 510 |    | 76 x 80 | 700 | 5.50        | 510 | 700 |




|                              |          |     |  |         |     |      |     |     |
|------------------------------|----------|-----|--|---------|-----|------|-----|-----|
| DB2-500 Pole bracket, double | 300-0191 | 510 |  | 76 x 80 | 700 | 7.90 | 510 | 700 |
|------------------------------|----------|-----|--|---------|-----|------|-----|-----|




**AOP534 LED-FT**

| Description                  | Part ID  | C1  | C2 | D × L1  | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|---------|-----|-------------|-----|-----|
| DB3-500 Pole bracket, triple | 300-0192 | 510 |    | 76 x 80 | 700 | 10.30       | 510 | 700 |




**Wall and pole brackets DS**

| Description                  | Part ID  | C1  | C2 | D × L1 | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|--------|-----|-------------|-----|-----|
| DS0-500 Wall bracket, single | 300-0064 | 510 | 70 |        | 650 | 2.50        | 510 | 650 |

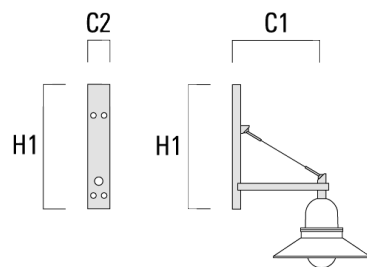


**AOP534 LED-FT**

| Description                  | Part ID  | C1  | C2 | D x L1  | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|---------|-----|-------------|-----|-----|
| DS1-500 Pole bracket, single | 300-0063 | 510 |    | 76 x 80 | 725 | 3.90        | 510 | 725 |



|                              |          |     |  |         |     |      |     |     |
|------------------------------|----------|-----|--|---------|-----|------|-----|-----|
| DS2-500 Pole bracket, double | 300-0066 | 510 |  | 76 x 80 | 725 | 5.30 | 510 | 725 |
|------------------------------|----------|-----|--|---------|-----|------|-----|-----|

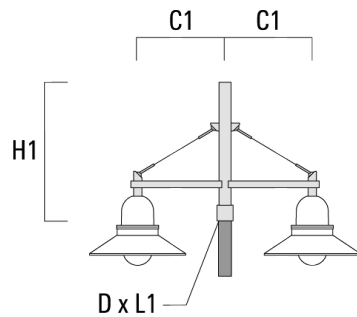

127-1419

**we-ef**

**AOP534 LED-FT**

| Description                  | Part ID  | C1  | C2 | D x L1  | H1  | Weight (kg) | C   | H   |
|------------------------------|----------|-----|----|---------|-----|-------------|-----|-----|
| DS3-500 Pole bracket, triple | 300-0069 | 510 |    | 76 x 80 | 725 | 6.70        | 510 | 725 |

