

115-1608

ZFT440 LED

we-ef





Description

IP66. Post top luminaire with shielded light source and canopy highlight feature.

| | |
|------------------------------|-----------------------------|
| Weight | 13.00 lb |
| Light distribution | [R65] Type IV Medium |
| Light source | LED-9/18W / 700 mA - 2700 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 9 |
| Rated input power | 20 W |
| Nominal Lumen (lm) | |
| LED Lumen | 270 |
| Total Lumen | 2430 |
| Tj | 85 |
| Delivered lumens (lm) | |
| LED Lumen | 234 |
| Total Lumen | 2106 |
| Ta | 25 |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 06/08/2025

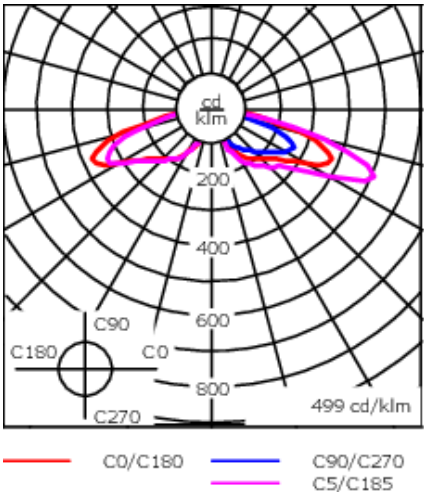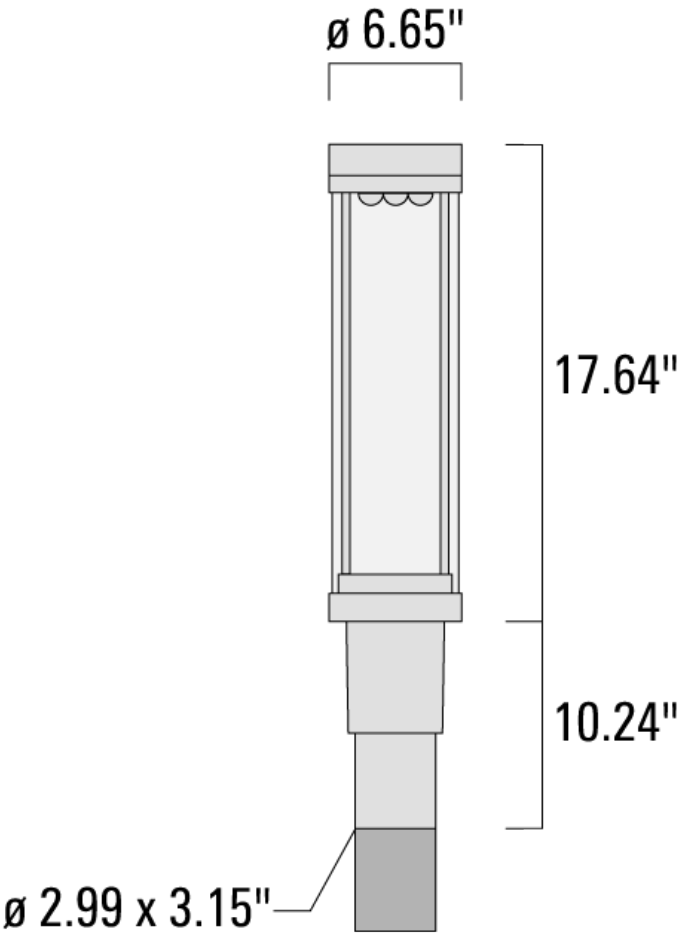

115-1608

ZFT440 LED

we-ef

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade die-cast aluminium alloy |
| Lens | Clear polycarbonate lens |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel hardware |
| Ingress protection | IP66 |
| Impact resistance | IK09 |
| Corrosion resistance | 5CE |
| Windage | 0.133 m ² |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] LED driver in 120 or 277 volt. |
| Driver / Ballast | Integral EC electronic converter |
| Power factor | > 0.9 |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | Contact WE-EF USA for ETL/UL certification status. |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 06/08/2025

Mounting Accessories

Wall and pole brackets RZ

| Description | Part ID | C1 | D1 | D2 | D × L1 | M1 | Weight(lb) |
|------------------------------|----------|--------|------|-------|---------|-------|------------|
| RZ0-400 Wall bracket, single | 115-1324 | 10.90" | 9.1" | 7.67" | 3" x 3" | 0.47" | 7.72 lbs |

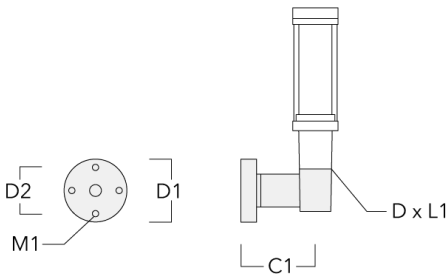

| | | | | | | | |
|------------------------------|----------|--------|--|--|---------|--|----------|
| RZ2-400 Pole bracket, double | 115-1323 | 10.16" | | | 3" x 3" | | 10.8 lbs |
|------------------------------|----------|--------|--|--|---------|--|----------|

