



Description

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter.


A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.


Optional 2200 K version available. To be specified at time of ordering.

Weight	2.30 kg
Light distribution	diffused distribution
Light source	LED-9/21W / 500 mA - 2700 K
CRI	80
Power supply	EC
LEDs	9
Rated input power	24 W
Nominal Lumen (lm)	
LED Lumen	302.2
Total Lumen	2720
Tj	85
Rated lumens (lm)	
LED Lumen	83.1
Total Lumen	747.5
Та	25





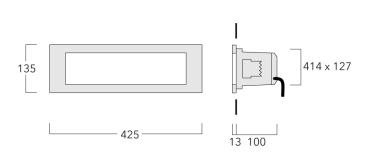



Specifications Material description

Body Marine-grade, die-cast aluminium alloy

Lens Polycarbonate lens

Colours Stainless Steel

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK10

Corrosion resistance 5CE+Primer

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

Additional information

Lifetime	Ta=40° L80B10 > 54000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement
	located on www.we-ef.com for further details.




STO279 LED Stainless steel

Mounting Accessories

Installation blockout

Description	Part ID	Α	В	C1	С
Installation blockout BST27-I	133-0217	447	157	125	130

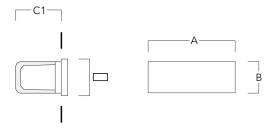

Installation blockout BST27-II 133-0219 447 157 135 140

