

STG259 LED Stainless steel



Description

Vandal-resistant, grated steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy housing, with polished stainless-steel frame. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blackout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Weight	2.90 lb
Light distribution	diffused distribution
Light source	LED-6/6W / 350 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	6
Rated input power	7.5 W


Nominal Lumen (lm)

LED Lumen	145
Total Lumen	870
Tj	85

Delivered lumens (lm)

LED Lumen	14.8
Total Lumen	88.8
Ta	25

STG259 LED Stainless steel

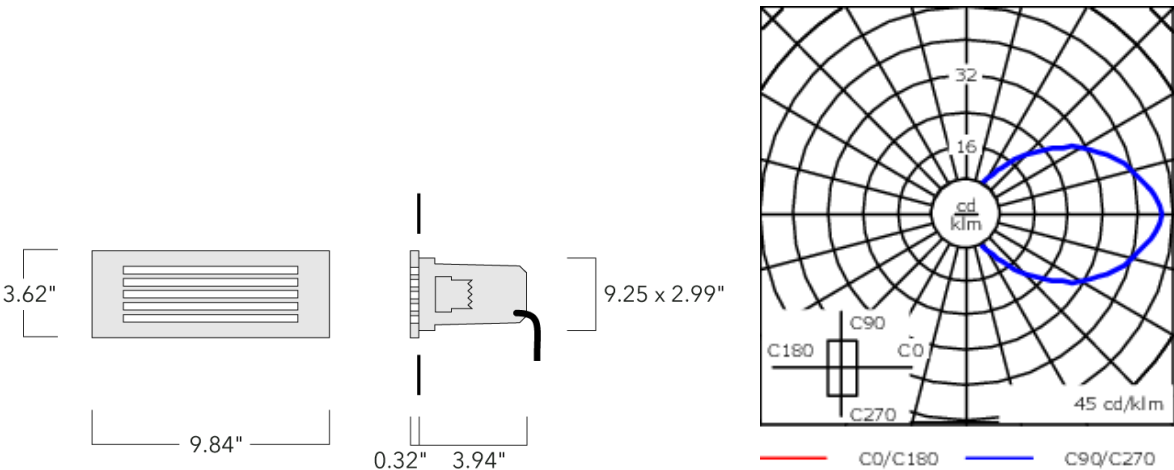

Specifications
Material description

Table with 2 columns: Component and Description. Rows include Body (die cast aluminum), Lens (Opal polycarbonate), Colors (Stainless Steel), Gasket (Silicone rubber), Fasteners (PCS polymer coated stainless steel), Ingress protection (IP55), Impact resistance (IK10), and Corrosion resistance (5CE).

Electrical description

Table with 2 columns: Component and Description. Rows include Power supply (Integral [ECG] electronic driver 120V-277V, 0-10V dimmable) and Driver / Ballast (Integral EC electronic converter).

Additional information

Table with 2 columns: Component and Description. Rows include Lifetime (Ta=25°/40° L80B10 > 54000h) and Listings (ETL listed. Suitable for wet locations).

Mounting Accessories

Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BST25-I	133-0076	10.51"	5.19"	5.12"	130

