




### Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Polycarbonate main lens. Two cable entries. Factory installed LED circuit board. Integral EC electronic converter. Optional 2200 K version available. To be specified at time of ordering.

A pre-installation blockout is available and recommended for mounting in concrete walls. To be ordered separately.

Weight	1.30 kg
Light distribution	diffused distribution
Light source	LED-6/6W / 350 mA - 2700 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	7.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	145
Total Lumen	870
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	4
Total Lumen	23.9
T <sub>a</sub>	25

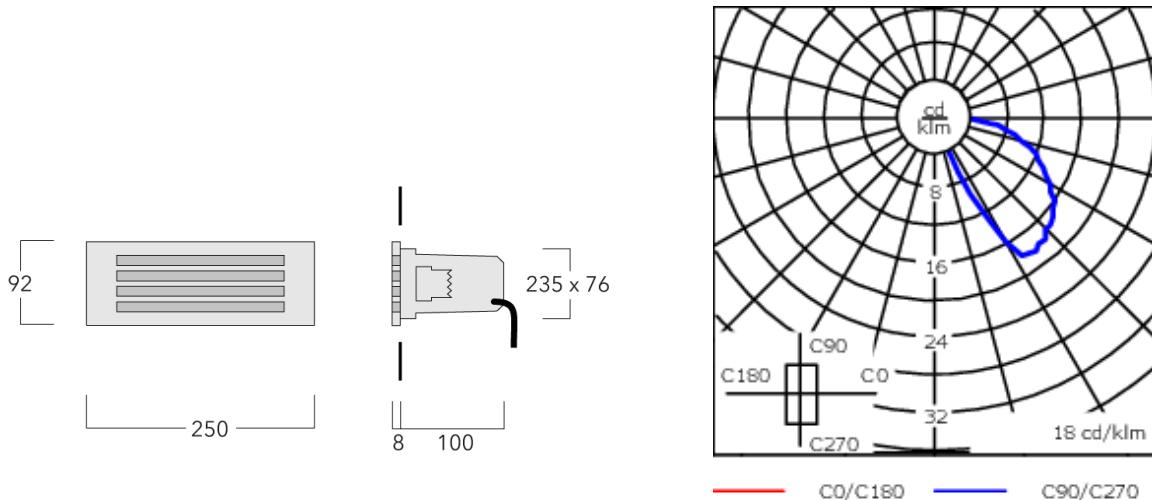

## Specifications

## Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Polycarbonate lens
Colours	 RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE+Primer

## Electrical description

---

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

## **Additional information**


---

Lifetime	Ta=40° L80B10 > 54000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

## Mounting Accessories

### Installation breakout

Description	Part ID	A	B	C1	C
Installation breakout BST25-I	133-0076	267	132	130	130

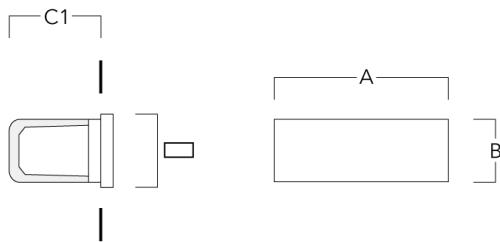

Installation breakout BST25-II	133-0078	267	132	140	140
--------------------------------	----------	-----	-----	-----	-----

