

STP204 LED

**Description**

Low glare steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

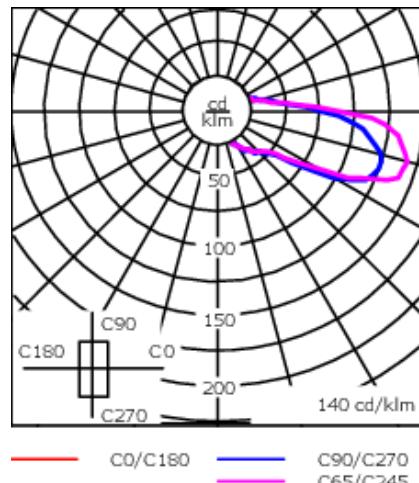
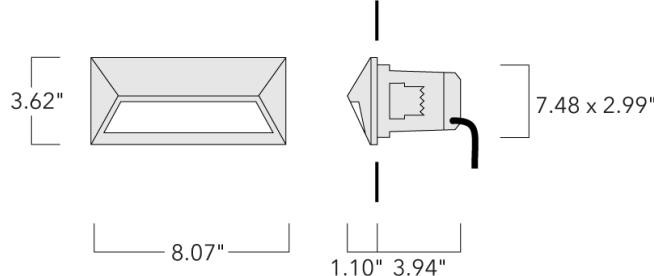
Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

| | |
|------------------------------|---------------------------------|
| Weight | 2.00 lb |
| Light distribution | asymmetric, forward-throw [A60] |
| Light source | LED-4/4W / 350 mA - 2700 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 4 |
| Rated input power | 5.5 W |
| Nominal Lumen (lm) | |
| LED Lumen | 145 |
| Total Lumen | 580 |
| T _j | 85 |
| Delivered lumens (lm) | |
| LED Lumen | 33 |
| Total Lumen | 131.9 |
| T _a | 25 |

STP204 LED

**Specifications****Material description**

| | |
|----------------------|---|
| Body | Luminaire body and lens frame constructed in die cast aluminum. |
| Lens | Prismatic polycarbonate lens. |
| Colors | <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> RAL9004 Black </div> <div style="text-align: center;"> RAL9007 Grey Metallic </div> <div style="text-align: center;"> RAL9016 White </div> <div style="text-align: center;"> RAL8019 Dark Bronze </div> </div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP55 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter |

Additional information

Lifetime Ta=25°/40° L80B10 > 54000h

Listings ETL listed. Suitable for wet locations.

Mounting Accessories

Installation breakout

| Description | Part ID | A | B | C1 | C |
|-------------------------------|----------|-------|-------|-------|-----|
| Installation breakout BST20-I | 133-0075 | 8.74" | 4.29" | 4.13" | 105 |

