

ETV139 LED MARKER LIGHT



Description

Marker Light.

IP69K. Class I. IK08. Marine-grade, all aluminum construction. Anodized aluminum extrusion. PCS hardware. Silicone CCG® Controlled Compression Gasket. Luminaire can be driven over at low speed, without accelerating or turning, by vehicles with air-filled tires, at a weight up to 5.5 tons (11,000 lbs) per wheel. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Linear PMMA LED lens. Integral driver in thermally separated compartment. Factory-installed LED circuit board. LED board can be easily removed for upgrading. 0-10V Dimming. Luminaire is factory-sealed and does not need to be opened during installation.

The installation blackout to be ordered separately; block-outs can house between 1-4 luminaires.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|------------------------|
| Weight | 10.50 lb |
| Light distribution | diffused distribution |
| Light source | LED-48/4,5W/W - 2700 K |
| Power supply | electronic gear |
| LEDs | 48 |
| Rated input power | 7 W |



Nominal Lumen (lm)

| | |
|-------------|-----|
| LED Lumen | 15 |
| Total Lumen | 720 |
| Tj | 25 |

Delivered lumens (lm)

| | |
|-------------|-------|
| LED Lumen | 4.1 |
| Total Lumen | 197.7 |
| Ta | 25 |

ETV139 LED MARKER LIGHT

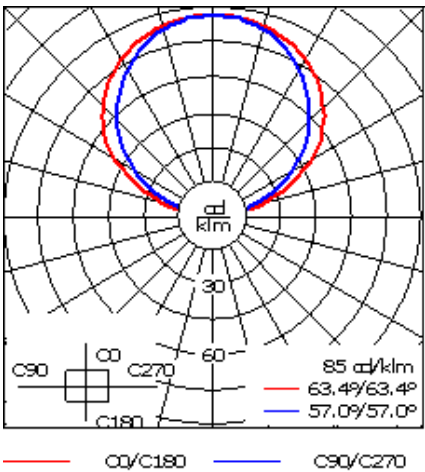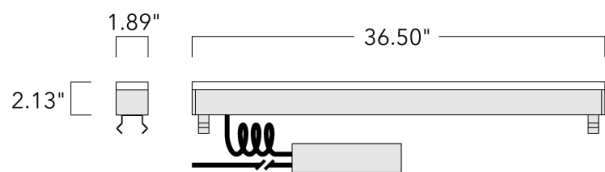

Specifications

Material description

| | |
|--------------------|--|
| Body | Marine-grade all aluminium construction. Anodized aluminium extrusion. |
| Lens | Safety glass lens; max. static load 3 tonnes |
| Colors | |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP69K - HIGHEST PROTECTION RATING AVAILABLE |
| Impact resistance | IK08 |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Electronic converter with 0-10V interface |
| Power factor | > 0.9 |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

Electrical Accessories

Sealable junction box

| Description | Part ID | C1 | M1 | M2 |
|-------------------------------|----------|------|--------|---------------|
| Sealable junction box SJB 130 | 185-1624 | 5.75 | Ø 0.39 | Ø 0.47 - 0.75 |




ETV139 LED MARKER LIGHT


Mounting Accessories

Installation blackout, Type I

| Description | Part ID | A | C1 | D1 | D2 | Weight (lb) |
|------------------------------|----------|--------|------|------|------|-------------|
| BEV130-I-1/927 (1 luminaire) | 186-0310 | 38.38" | 6.30 | 2.13 | 4.72 | 10.36 lbs |

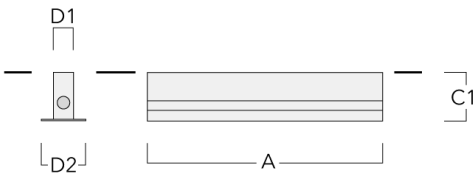


| | | | | | | |
|-------------------------------|----------|-------|------|------|------|-------|
| BEV130-I-2/927 (2 luminaires) | 186-0311 | 74.96 | 6.30 | 2.13 | 4.72 | 19.84 |
|-------------------------------|----------|-------|------|------|------|-------|

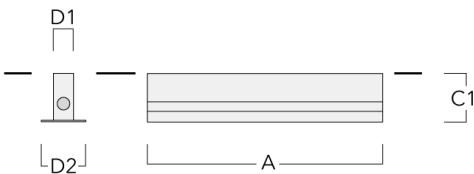

ETV139 LED MARKER LIGHT

| Description | Part ID | A | C1 | D1 | D2 | Weight (lb) |
|-------------------------------|----------|--------|------|------|------|-------------|
| BEV130-I-3/927 (3 luminaires) | 186-0312 | 111.54 | 6.30 | 2.13 | 4.72 | 29.10 lbs |

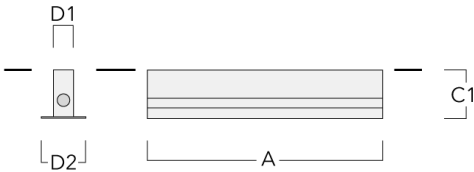

| | | | | | | |
|-------------------------------|----------|--------|------|------|------|-------|
| BEV130-I-4/927 (4 luminaires) | 186-0313 | 148.11 | 6.30 | 2.13 | 4.72 | 38.58 |
|-------------------------------|----------|--------|------|------|------|-------|

