



Description

IP67, Class I. IK09. Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 1.5 m of flexible PVC free cable. IP68 in-line connector facilitates easy removal for off-site lamp replacement. Integral EC electronic converter in thermally separated compartment. 'No tool' removable gear/lens tray. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. Luminaire requires installation blackout which is included in supply. Blackout is designed for installation in concrete. Optional 2200 K version available. To be specified at time of ordering.

Luminaire can be driven over at low speeds only. It is not designed for normal traffic conditions. Luminaire can be damaged under such conditions as breaking, accelerating or turning.

| | |
|--------------------|-------------------------------|
| Weight | 5.10 kg |
| Light distribution | controlled beam, two-sided |
| Light source | LED-2x6/12W / 350 mA - 2700 K |
| CRI | 80 |
| Power supply | electronic transformer |
| BUG | B0 U3 G2 |
| LEDs | 12 |
| Rated input power | 14 W |

Nominal Lumen (lm)

| | |
|-------------|------|
| LED Lumen | 145 |
| Total Lumen | 1740 |
| Tj | 85 |



Rated lumens (lm)

| | |
|-------------|-------|
| LED Lumen | 77.4 |
| Total Lumen | 928.3 |
| Ta | 25 |

185-3530



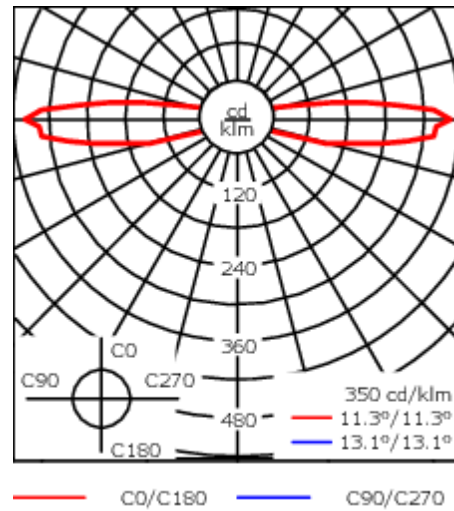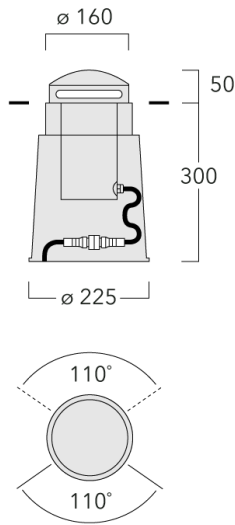


EFC120 LED

we-ef



Specifications

Material description

| | |
|----------------------|---|
| Body | Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy |
| Lens | PC |
| Colours |  RAL9004 Signal black  RAL9006 White aluminium  RAL9007 Grey aluminium  RAL7016 Anthracite grey  RAL9016 Traffic white |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP67 |
| Impact resistance | IK09 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter |
| Power factor | > 0.9 |
| Surge protection | 1/2 kV |

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0

info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

185-3530

EFC120 LED

we-ef

Additional information

Lifetime Ta=25° L90B10 > 90000h

Energy efficiency class C-D (Light source)

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024