



Description



IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Two cable entries.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output.

|                    |                              |
|--------------------|------------------------------|
| Weight             | 2.00 kg                      |
| Light distribution | diffused distribution        |
| Light source       | LED-FT-17W / 500 mA - 2700 K |
| CRI                | 80                           |
| Power supply       | EC                           |
| LEDs               | 1                            |
| Rated input power  | 20 W                         |

|                   |        |
|-------------------|--------|
| Rated lumens (lm) |        |
| LED Lumen         | 1346.8 |
| Total Lumen       | 1346.8 |
| Ta                | 25     |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 2935 |
| Total Lumen        | 2935 |
| Tc                 | 25   |

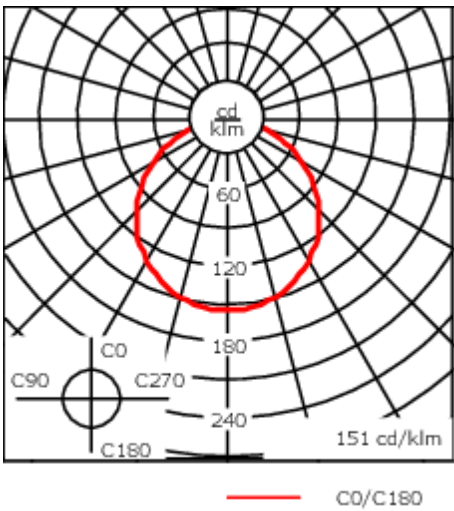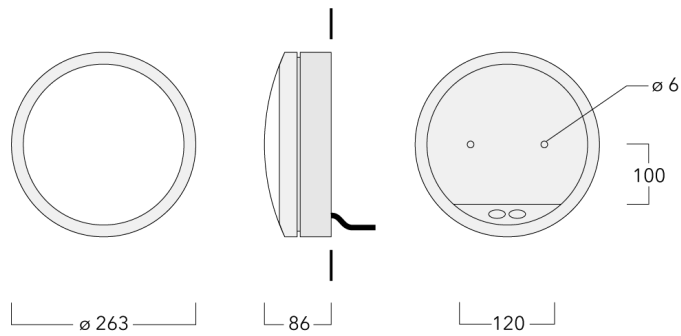

Specifications  
Material description

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, die-cast aluminium alloy   |
| Colours              | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> |
| Gasket               | Silicone rubber gasket   |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware (unpainted)  |
| Ingress protection   | IP66   |
| Impact resistance    | IK10   |
| Corrosion resistance | 5CE+Primer   |

Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 230V / 50 Hz                     |
| Driver / Ballast | Integral EC electronic converter |

Additional information

|          |  |
|----------|--|
| Lifetime | Ta=40° L70B50 > 50000h   |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. |