

## STO134 LED Reduced Depth - Stainless Steel



**Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

Weight	1.00 kg
Light distribution	diffused distribution
Light source	LED-5W / 250 mA - 2700 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	5.6 W
<b>Rated lumens (lm)</b>	
LED Lumen	75.4
Total Lumen	75.4
Ta	25
<b>Nominal Lumen (lm)</b>	
LED Lumen	720
Total Lumen	720
Tc	25

## STO134 LED Reduced Depth - Stainless Steel

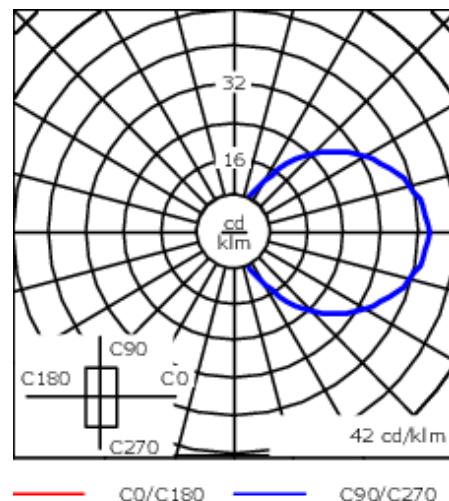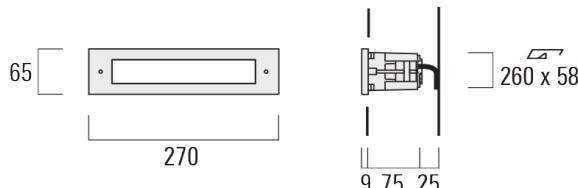

## Specifications

## Material description

Body	Marine-grade, die-cast aluminium alloy with polished stainless steel frame
Lens	Polycarbonate
Colours	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

## Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

## Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.
----------	--