

STO134 LED Reduced Depth - Stainless Steel



**Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy, with polished stainless steel frame. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

| | |
|---------------------------|--------------------------|
| Weight | 1.00 kg |
| Light distribution | diffused distribution |
| Light source | LED-5W / 250 mA - 2700 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 1 |
| Rated input power | 5.6 W |
| Rated lumens (lm) | |
| LED Lumen | 75.4 |
| Total Lumen | 75.4 |
| Ta | 25 |
| Nominal Lumen (lm) | |
| LED Lumen | 720 |
| Total Lumen | 720 |
| Tc | 25 |

STO134 LED Reduced Depth - Stainless Steel

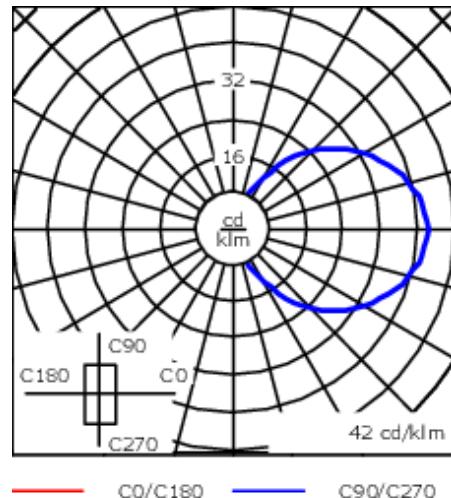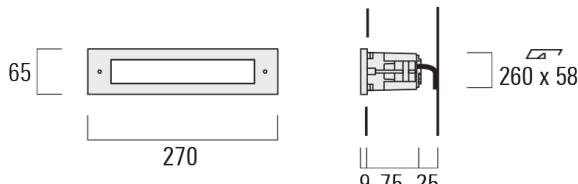

Specifications

Material description

| | |
|----------------------|--|
| Body | Marine-grade, die-cast aluminium alloy with polished stainless steel frame |
| Lens | Polycarbonate |
| Colours | Stainless Steel |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter |

Additional information