



Description

Louvred Steplight.

ADA (American Disabilities Act) Compliant.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Opal polycarbonate main lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

A pre-installation blackout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)



| | |
|--------------------|--------------------------|
| Weight | 1.98 lb |
| Light distribution | Shielded |
| Light source | LED-6W / 350 mA - 2700 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 1 |
| Rated input power | 8 W |

Delivered lumens (lm)

| | |
|-------------|------|
| LED Lumen | 23.8 |
| Total Lumen | 23.8 |
| Ta | 25 |

Nominal Lumen (lm)

| | |
|-------------|-----|
| LED Lumen | 990 |
| Total Lumen | 990 |
| Tc | 25 |

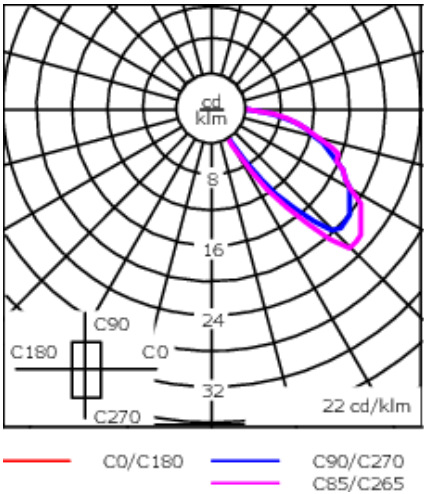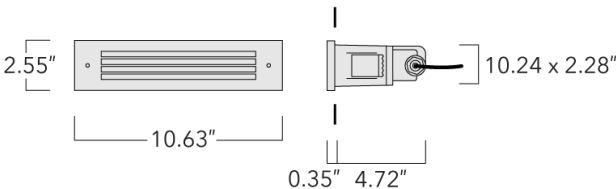

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, die-cast aluminium alloy |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone rubber gasket |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter |


Additional information

| | |
|----------|---|
| Lifetime | Ta=25°/40° L80B10 > 54000h |
| Listings | ETL listed. Suitable for wet locations. |

Mounting Accessories

Installation blackout

| Description | Part ID | C1 | C2 | D1 | D2 | D3 | H1 | H2 | H3 | Weight (lb) |
|---------------------------------------|----------|------|------|-------|-------|----|------|------|----|-------------|
| Installation blackout BST13-I (Proud) | 190-9030 | 5.12 | 0.47 | 10.63 | 13.31 | | 2.56 | 4.21 | | 1.98 |

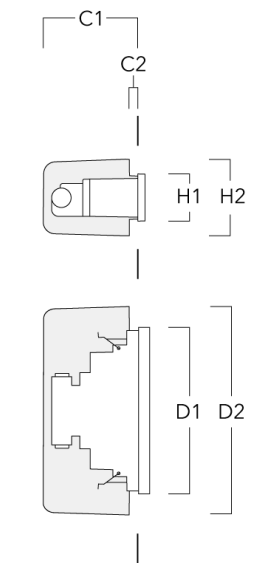

| | | | | | | | | | | |
|--|----------|------|------|-------|-------|-------|------|------|------|------|
| Installation blackout BST13-II (Flush) | 190-9031 | 5.71 | 0.87 | 10.63 | 11.02 | 13.31 | 2.56 | 2.95 | 4.21 | 1.98 |
|--|----------|------|------|-------|-------|-------|------|------|------|------|

