

## STI134 LED Reduced Depth



**Description**

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry.

|                           |                          |
|---------------------------|--------------------------|
| Weight                    | 0.90 kg                  |
| Light distribution        | floor wash               |
| Light source              | LED-6W / 350 mA - 2700 K |
| CRI                       | 80                       |
| Power supply              | EC                       |
| LEDs                      | 1                        |
| Rated input power         | 8 W                      |
| <b>Rated lumens (lm)</b>  |                          |
| LED Lumen                 | 161.1                    |
| Total Lumen               | 161.1                    |
| Ta                        | 25                       |
| <b>Nominal Lumen (lm)</b> |                          |
| LED Lumen                 | 990                      |
| Total Lumen               | 990                      |
| Tc                        | 25                       |

## STI134 LED Reduced Depth

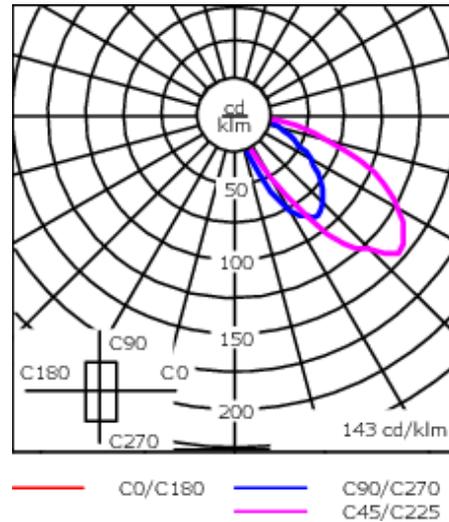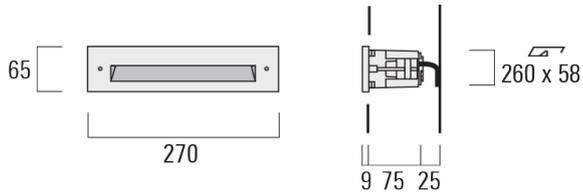

## Specifications

### Material description

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, die-cast aluminium alloy   |
| Lens                 | Polycarbonate  |
| Colours              | <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: black; margin-right: 5px;"></div> <span>RAL9004 Signal black</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 20px; background-color: #cccccc; margin-right: 5px;"></div> <span>RAL9006 White aluminium</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px;"></div> <span>RAL9007 Grey aluminium</span> </div> |
| Gasket               | Silicone rubber gasket   |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware (unpainted)  |
| Ingress protection   | IP66   |
| Impact resistance    | IK10   |
| Corrosion resistance | 5CE+Primer   |

### Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 230V / 50 Hz                     |
| Driver / Ballast | Integral EC electronic converter |

### Additional information

|          |  |
|----------|--|
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. |
|----------|--|