

STI134 LED Shallow Depth




**Description**

IP66. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate main lens. Silicone rubber gasket. Luminaire is factory-sealed and does not need to be opened during installation. Factory-installed with 30 cm of flexible halogen-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. One cable entry. Second cable entry for through wiring available on request.

Weight	0.85 kg
Light distribution	floor wash
Light source	LED-6W / 350 mA - 2700 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	8 W
Rated lumens (lm)	
LED Lumen	161.1
Total Lumen	161.1
Ta	25
Nominal Lumen (lm)	
LED Lumen	990
Total Lumen	990
Tc	25

STI134 LED Shallow Depth

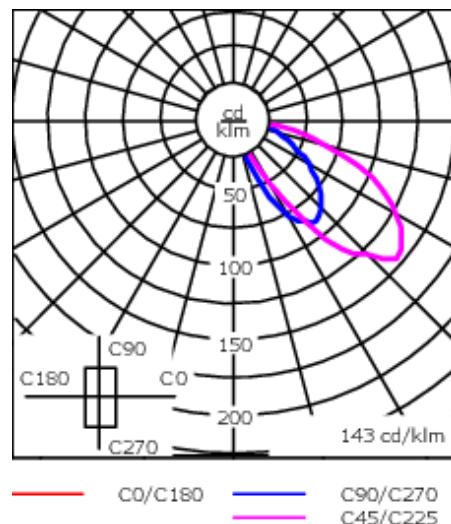

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Polycarbonate
Colours	<div style="display: inline-block; width: 20px; height: 10px; background-color: black; margin-right: 10px;"></div> RAL9004 Signal black <div style="display: inline-block; width: 20px; height: 10px; background-color: #808080; margin-right: 10px;"></div> RAL9007 Grey aluminium <div style="display: inline-block; width: 20px; height: 10px; background-color: #333333; margin-right: 10px;"></div> RAL7016 Anthracite grey <div style="display: inline-block; width: 20px; height: 10px; background-color: #F0F0F0; margin-right: 10px;"></div> RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter

Additional information