




Description

IP67. Inground uplight. Suitable for flush installation in concrete or earth. Special effects and distributions can be realized with linear lens, flood lens, 6° directional lens, 20° directional lens, or color filters.

Weight	10.10 lb
Light distribution	symmetric, medium beam [M]
Light source	LED-3/6W / 700 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	3
Rated input power	7.5 W

Nominal Lumen (lm)	
LED Lumen	270
Total Lumen	810
Tj	85
Delivered lumens (lm)	
LED Lumen	197.7
Total Lumen	593.2
Ta	25

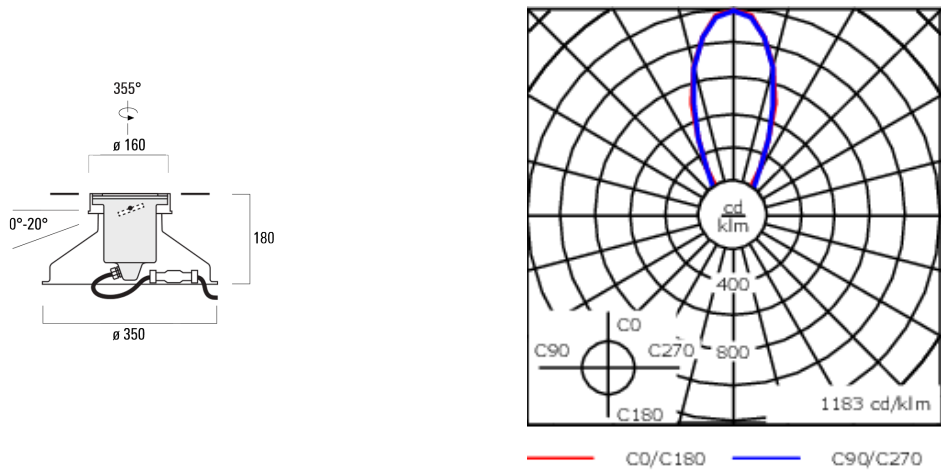

Specifications

Material description

Colors Stainless Steel


Electrical description

Additional information

Optical Accessories

Honeycomb louvre

Description	Part ID	C1
IW-ETC120_GB_LED Honeycomb louvre	185-2869	2.89



Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-9612	2.36

