



### Description

IP67. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. 1-10 V analogue dimming or DALI interface (6 W luminaires only) available on request.

Luminaire installation blockout and sealable junction box included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch **<strong><a href="https://vimeo.com/672613058">here.</a></strong>**



|                    |                                  |
|--------------------|----------------------------------|
| Weight             | 4.00 kg                          |
| Light distribution | symmetric, very narrow beam [EE] |
| Light source       | LED-3/6W / 700 mA - 2700 K       |
| CRI                | 80                               |
| Power supply       | EC                               |
| LEDs               | 3                                |
| Rated input power  | 7.5 W                            |

### Nominal Lumen (lm)

|                |     |
|----------------|-----|
| LED Lumen      | 270 |
| Total Lumen    | 810 |
| T <sub>j</sub> | 85  |

### Rated lumens (lm)

|                |       |
|----------------|-------|
| LED Lumen      | 201.9 |
| Total Lumen    | 605.8 |
| T <sub>a</sub> | 25    |

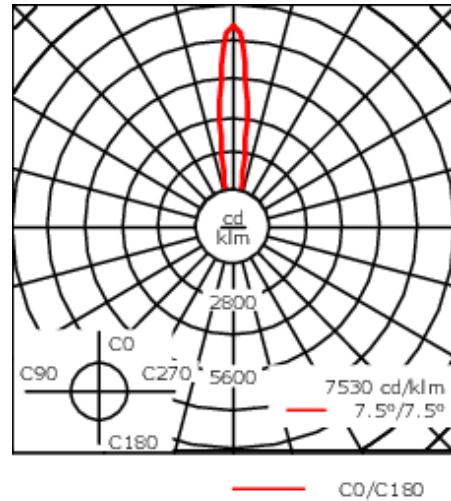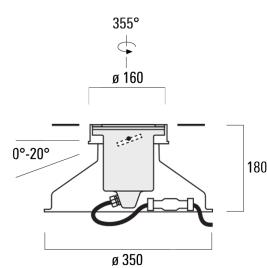

## Specifications

### Material description

|                    |  |
|--------------------|--|
| Body               | Stainless steel construction   |
| Lens               | Safety glass lens, max. load 5 tonnes  |
| Colours            | <span style="background-color: #808080; display: inline-block; width: 15px; height: 15px; vertical-align: middle;"></span> Stainless Steel |
| Gasket             | Silicone rubber gasket   |
| Fasteners          | PCS Polymer Coated Stainless Steel Hardware (unpainted)  |
| Ingress protection | IP67   |
| Impact resistance  | IK10+  |

### Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 230V / 50 Hz                     |
| Driver / Ballast | Integral EC electronic converter |
| Termination      | Junction box supplied            |


### Additional information

|          |  |
|----------|--|
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage. |
|----------|--|

## Mounting Accessories

### Installation cover

| Description           | Part ID  | C1  |
|-----------------------|----------|-----|
| Installation cover BE | 185-0796 | 160 |




C1

## Optical Accessories

### Honeycomb louvre


| Description      | Part ID  | C1 |
|------------------|----------|----|
| Honeycomb Louvre | 185-2869 | 60 |



— C1 —

### Linear spread lens


| Description               | Part ID  | C1 |
|---------------------------|----------|----|
| Linear spread lens IO-180 | 185-9612 | 60 |



— C1 —

**Surface wash lens**

| Description       | Part ID  | Additional information |
|-------------------|----------|------------------------|
| Flood lens I0-360 | 185-9613 | 60                     |

**Linear louvre**

| Description                     | Part ID  | Additional information | Additional information |
|---------------------------------|----------|------------------------|------------------------|
| Linear louvre LL for 120-GB LED | 185-9614 | ETC320                 | 60                     |



**Colour filter**

| Description      | Part ID    |
|------------------|------------|
| Colour filter IF | on request |

