



Description



IP67. Inground uplight. Suitable for flush installation in concrete or earth. Special effects and distributions can be realized with linear lens, flood lens, 6° directional lens, 20° directional lens, or color filters.

Weight	10.10 lb
Light distribution	symmetric, very narrow beam, 'sharp cut-off' [VNS]
Light source	LED-3/6W / 700 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	3
Rated input power	7.5 W
Nominal Lumen (lm)	
LED Lumen	270
Total Lumen	810
Tj	85
Delivered lumens (lm)	
LED Lumen	217.4
Total Lumen	652.3
Ta	25

185-9794

ETC320-GB LED

we-ef

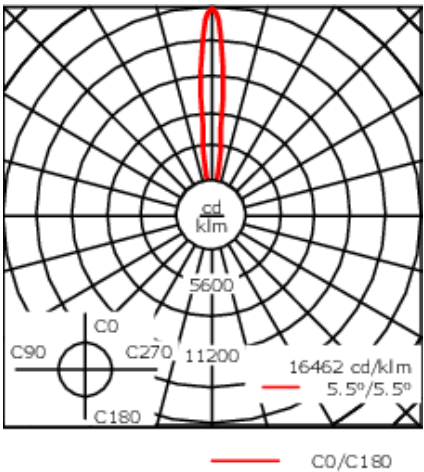

Specifications
Material description

Colors	<div></div> Stainless Steel
--------	-----------------------------


Electrical description

Additional information

Optical Accessories

Honeycomb louvre

Description	Part ID	C1
IW-ETC120_GB_LED Honeycomb louvre	185-2869	2.89




185-9794



ETC320-GB LED

Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-9612	2.36



C1