

### **Description**

IP66, Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during the installation. 0-10V Dimming comes standard with luminaire.

Knuckle permits  $350^{\circ}$  horizontal and  $90^{\circ}$  vertical aiming of optics.


Specify product with 7 Digit product code - Finish Color. (Other accessories, such as mounting, optical, and electrical, must be specified separately.)


Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessories)

Weight	17.00 lb
Light distribution	linear spread, very narrow beam [VN]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	3480
Tj	85
Delivered lumens (lm)	
LED Lumen	228.7
Total Lumen	2744.2
Та	25

### FLC131 LED - Ceon

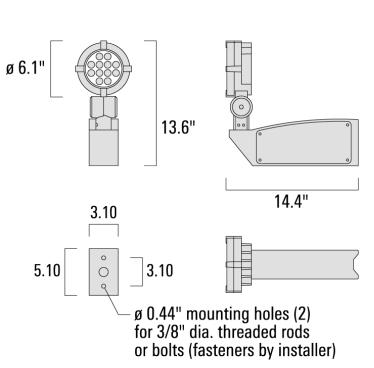



# Specifications Material description

Body Marine-grade, die-cast aluminium alloy

Lens Safety glass lens

Colors

Gasket Silicone CCG® Controlled Compression Gasket
Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP66
Impact resistance IK07
Corrosion resistance 5CE
Windage 0,067m²

## **Electrical description**

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

Driver / Ballast Integral EC electronic converter, thermally separated

145-6510+146-0418

we-ef

FLC131 LED - Ceon


### **Additional information**

### FLC131 LED - Ceon

# **Optical Accessories**

### **Glare shield**

Description	Part ID	Α	C1
Glare shield ES	146-0156	4.33	3.94






### FLC131 LED - Ceon

### Snoot

Description	Part ID	Α	C1
Snoot ET	146-0397	3.76	4.96



# **Softening Lens**

scription Part ID	C1
360 146-0623	4.33"

