

Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Luminaire is factory-sealed and does not need to be opened during installation.

Knuckle permits 350° horizontal and 90° vertical aiming of optics.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	20.00 lb
Light distribution	wallwash
Light source	LED-24/48W / 700 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	24
Rated input power	54 W
Nominal Lumen (lm)	
LED Lumen	310
Total Lumen	7440
Tj	85
Delivered lumens (lm)	
LED Lumen	216.1
Total Lumen	5186.6
Та	25

FLC141 LED - Ceon

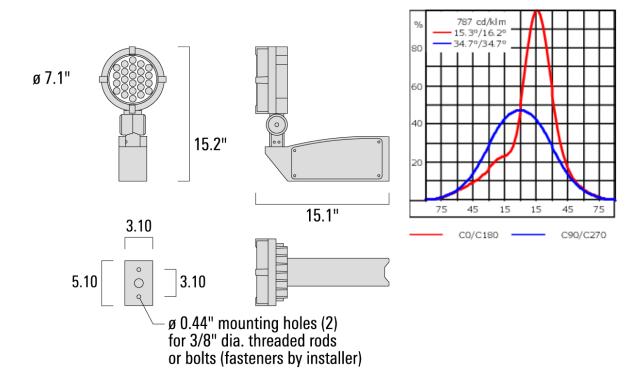

Specifications Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colors	RAL9004 Black			
	RAL9007 Grey Metallic			
	RAL9016 White			
	RAL8019 Dark Bronze			
Gasket	Silicone CCG® Controlled Compression Gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Corrosion resistance	5CE			

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter, thermally separated

146-6001+146-0646

we-ef

FLC141 LED - Ceon


Additional information

FLC141 LED - Ceon

Optical Accessories

Glare shield

Description	Part ID	Α	C1
Glare shield ES	146-0229	4.72	5.71





FLC141 LED - Ceon

Snoot

Description	Part ID	Α	C1
Snoot ET	146-0398	4.72	5.70

