



**Description**

IP67. Inground uplight. Suitable for flush installation in concrete or earth. Special effects and distributions can be realized with linear lens, flood lens, 6° directional lens, 20° directional lens, or color filters.

|                    |                            |
|--------------------|----------------------------|
| Weight             | 10.10 lb                   |
| Light distribution | symmetric, medium beam [M] |
| Light source       | LED-3/6W / 700 mA - 2700 K |
| CRI                | 80                         |
| Power supply       | electronic gear            |
| LEDs               | 3                          |
| Rated input power  | 7.5 W                      |

**Nominal Lumen (lm)**

|             |     |
|-------------|-----|
| LED Lumen   | 270 |
| Total Lumen | 810 |
| Tj          | 85  |



**Delivered lumens (lm)**

|             |       |
|-------------|-------|
| LED Lumen   | 207.9 |
| Total Lumen | 623.6 |
| Ta          | 25    |

185-9792+185-9612

ETC320-GB LED

we-ef

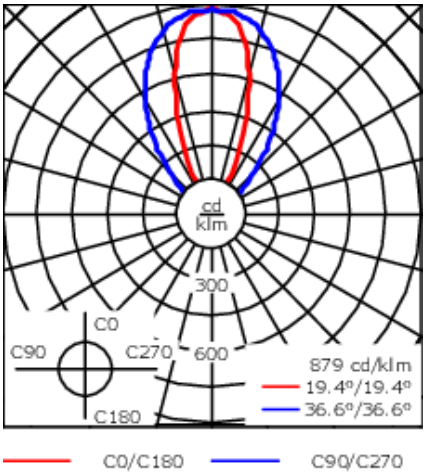

Specifications  
Material description

|        |                             |
|--------|-----------------------------|
| Colors | <div></div> Stainless Steel |
|--------|-----------------------------|


Electrical description

Additional information

Optical Accessories

Honeycomb louvre

| Description                       | Part ID  | C1   |
|-----------------------------------|----------|------|
| IW-ETC120_GB_LED Honeycomb louvre | 185-2869 | 2.89 |



Linear spread lens

| Description               | Part ID  | C1   |
|---------------------------|----------|------|
| Linear spread lens IO-180 | 185-9612 | 2.36 |

