

ETC320-GB LED**Description**

IP67. Inground uplight. Suitable for flush installation in concrete or earth. Special effects and distributions can be realized with linear lens, flood lens, 6° directional lens, 20° directional lens, or color filters.

Weight	10.10 lb
Light distribution	linear spread, very narrow beam [VN]
Light source	LED-3/6W / 700 mA - 2700 K
CRI	80
Power supply	electronic gear
LEDs	3
Rated input power	7.5 W
Nominal Lumen (lm)	
LED Lumen	270
Total Lumen	810
Tj	85
Delivered lumens (lm)	
LED Lumen	195.5
Total Lumen	586.6
Ta	25

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030



customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 04/19/2025

185-9793+185-9612

ETC320-GB LED

we-ef

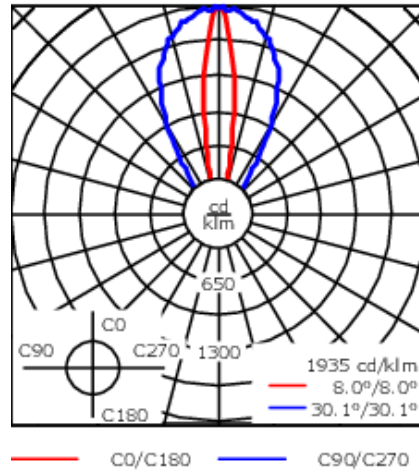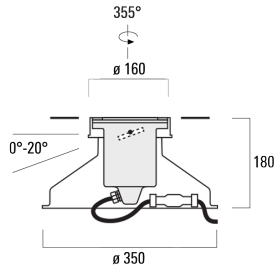

Specifications

Material description

Colors



Stainless Steel

Electrical description

Additional information

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030


customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 04/19/2025

Optical Accessories

Honeycomb louvre


Description	Part ID	C1
IW-ETC120_GB_LED Honeycomb louvre	185-2869	2.89



ETC320-GB LED

Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-9612	2.36



WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 04/19/2025