

## FLC220 LED COLOR CHANGING FRAMING PROJECTOR

**Description**

RGBW/RGBA Color Changer Profile Projector [FP] for framing applications, polygon shape.

Spherical and aspherical, double flat convex lens system. Aperture angle ranges from 14.6-22°.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland, second gland for through wiring on request. PMMA LED lens array. Integral driver, thermally separated. Factory-installed LED circuit board. RGBW/RGBA. DMX interface.

For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1,5 + DMX".

Color Boost technology: With Color Boost the targeted and selective control of individual channels or colors means that a higher power of the LEDs can be accessed than in total when all colors are simultaneously operated. The light output is thus maximized by targeted control of individual channels/colors.

Weight	18.10 lb
Light distribution	symmetric Framing-Projector [FP] - min aperture angle
Light source	LED-FT-24W - RGBW/4K
CRI	20/80
Power supply	electronic gear
LEDs	1
Rated input power	25 W

**Delivered lumens (lm)**

LED Lumen	490.1
Total Lumen	490.1
Ta	25

**Nominal Lumen (lm)**

LED Lumen	2600
Total Lumen	2600
Tc	25

**FLC220 LED COLOR CHANGING FRAMING PROJECTOR**



Specify product with 7 Digit product code - Finish Color.

Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

## FLC220 LED COLOR CHANGING FRAMING PROJECTOR

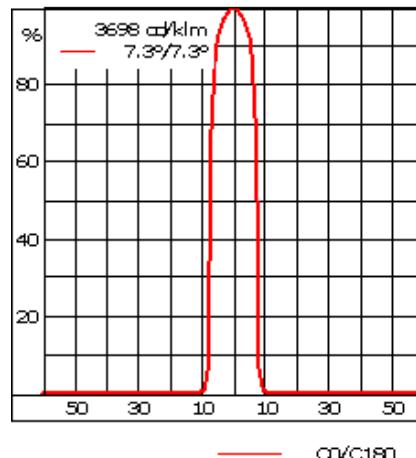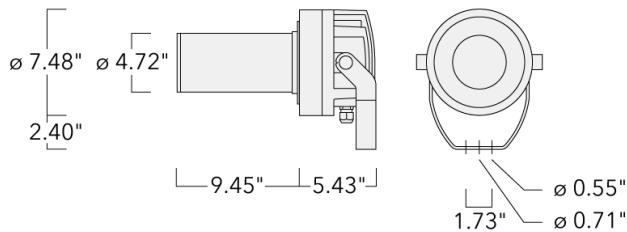**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span>  RAL9004 Black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #808080; border-radius: 50%;"></span>  RAL9007 Grey Metallic         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #F0F0F0; border-radius: 50%;"></span>  RAL9016 White         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #800000; border-radius: 50%;"></span>  RAL8019 Dark Bronze         </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IK07
Impact resistance	IP66
Corrosion resistance	5CE
Windage	0.503

**Electrical description**

Power supply	Integral [ECG] electronic driver 120V-277V.
Driver / Ballast	Integral EC electronic converter with DMX Interface
Power factor	> 0.9

**FLC220 LED COLOR CHANGING FRAMING PROJECTOR****Additional information**

---

Lifetime Ta=25°/40° L70B50 > 50000h

Listings Contact WE-EF USA for ETL/UL certification status.


---

## FLC220 LED COLOR CHANGING FRAMING PROJECTOR

## Mounting Accessories

## Short post EM



Description	Part ID	D1	D2	H1	M1	Weight(lb)
EM1-M16 AL	270-0001	6.3"	5.12"	8"	0.35"	4.85 lbs

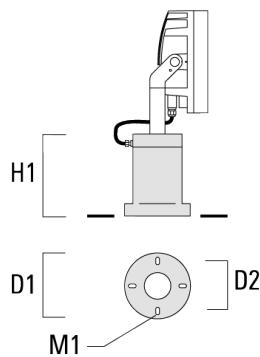



## FLC220 LED COLOR CHANGING FRAMING PROJECTOR

## Pole clamp PC

Description	Part ID	D1	Weight (lb)
PC1 76-89/60 Pole clamp, single ( $\emptyset$ 3"-3.5")	139-2702	3.0-3.50	2.20

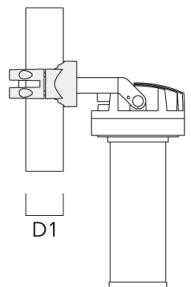



PC2 76-89/60 Pole clamp, double ( $\emptyset$ 3"-3.5")	139-2703	3.0-3.50	2.20
--	----------	----------	------





## FLC220 LED COLOR CHANGING FRAMING PROJECTOR

Description	Part ID	D1	Weight (lb)
PC1 82-109/60 Pole camp, single (Ø 3.25"-4.3")	139-2704	3.20-4.30	2.40





PC2 82-109/60 Pole clamp, double (Ø 3.25"-4.25")	139-2705	3.20-4.30	2.40
--	----------	-----------	------





## FLC220 LED COLOR CHANGING FRAMING PROJECTOR

Description	Part ID	D1	Weight (lb)
PC1 102-114/60 Pole clamp, single (Ø 4"-4.5")	139-2706	4.0-4.50	2.65

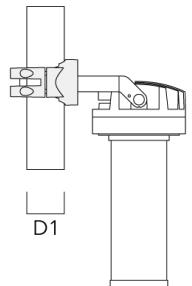



PC2 102-114/60 Pole clamp, double (Ø 4"-4.5")	139-2707	4.0-4.50	2.65
--	----------	----------	------

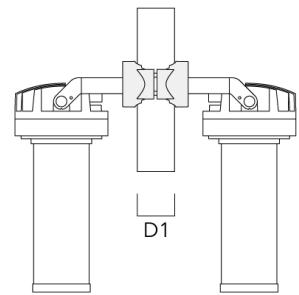
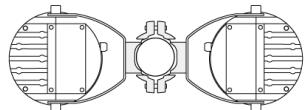


## FLC220 LED COLOR CHANGING FRAMING PROJECTOR

Description	Part ID	D1	Weight (lb)
PC1 114-133/60 Pole clamp, single (Ø 4.5"-5.25")	139-2708	4.5-5.25	3.10

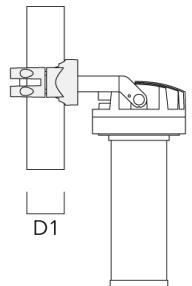

PC2 114-133/60 Pole clamp, double (Ø 4.5"-5.25")	139-2709	4.5-5.25	3.10
---	----------	----------	------



**FLC220 LED COLOR CHANGING FRAMING PROJECTOR****Optical Accessories****Conversion Kit**

Description	Part ID
FLC220-FP 17-28 Degree Conversion Kit	139-6959
FLC220-FP 37-51 Degree Conversion Kit	139-6961