

DAC240 LED



Description

IP65, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC_R_ One LED Concept. Factory installed LED circuit board.



2700 K option available on request.

Weight	7.60 kg
Light distribution	linear spread, very narrow beam [EE]
Light source	LED-24/48W / 700 mA - 2700 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	54 W

Nominal Lumen (lm)	
LED Lumen	270
Total Lumen	6480
Tj	85

Rated lumens (lm)	
LED Lumen	215.1
Total Lumen	5162.8
Ta	25

DAC240 LED

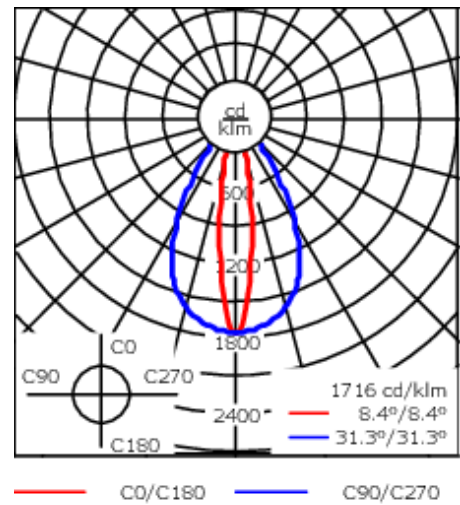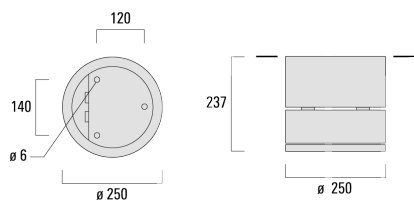


DAC240 LED

Optical Accessories


Surface wash lens

Description	Part ID	C1
IO-360-DAC/DOC240-LED	134-1441	191



Wallwash lens


Description	Part ID	C1
IO-20-WW-DAC/DOC240-LED	134-1492	191



DAC240 LED

Linear spread lens

Description	Part ID	C1
IO-180-DAC/DOC240-LED	134-1382	191



DAC240 LED

Control

DALI interface

Description	Part ID	C
DALI interface	430-0013	90