



Description


IP66. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate outer lens. Service door with fused cable connecting box. CAD-optimized indirect optics for superior illumination and glare control. 0-10V Dimming comes standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|--------------------|
| Weight | 55.10 lb |
| Light distribution | [C50] Type V Short |
| Light source | LED-FT-37W (2700K) |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 1 |
| Rated input power | 42 W |

| | |
|------------------------------|--------|
| Delivered lumens (lm) | |
| LED Lumen | 5020.2 |
| Total Lumen | 5020.2 |
| Ta | 25 |

| | |
|---------------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 6145 |
| Total Lumen | 6145 |
| Tc | 25 |

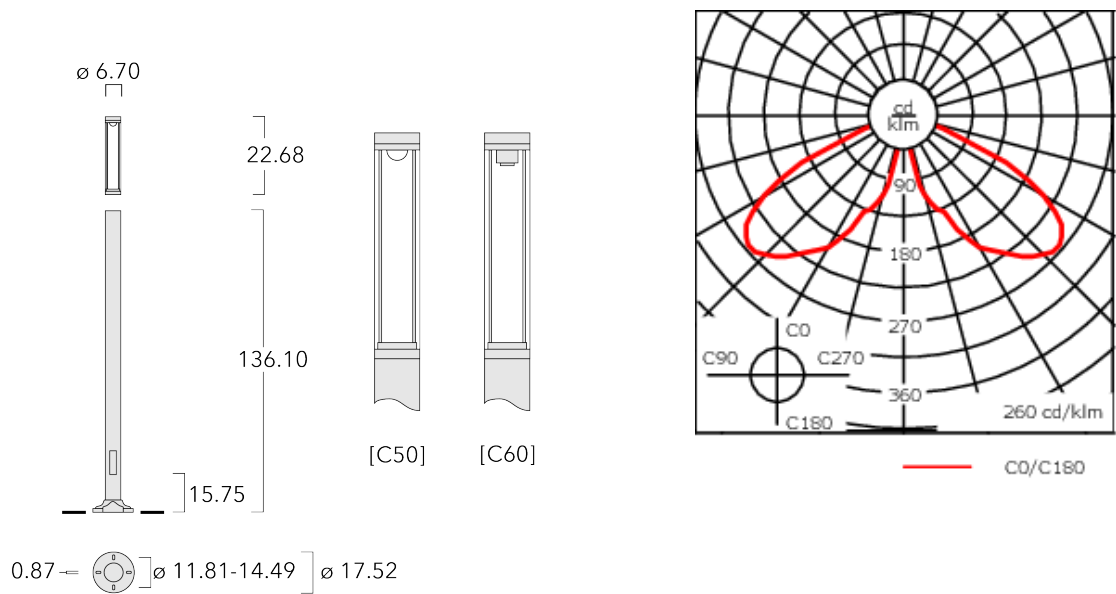

Specifications

Material description

| | |
|----------------------|---|
| Body | Luminaire head, base plate and base plate cover constructed in die cast aluminum |
| Lens | Clear polycarbonate lens. |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel hardware |
| Ingress protection | IP66 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---------------------------------------|
| Power supply | Integral [ECG] LED driver in 120-277V |
| Driver / Ballast | Integral EC electronic converter |


Additional information

| | |
|------------|---|
| Lifetime | Ta=25°/40° L70B50 > 50000h |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings | ETL listed. Suitable for wet locations. |

Mounting Accessories

Planted root

| Description | Part ID | D1 | D2 | D3 | D4 | H1 | H2 | M1 | Weight(lb) |
|--------------------|----------|-------|-------|------|------|-------|-------|------|------------|
| Planted root ESV10 | 300-0949 | 16.34 | 13.39 | 4.96 | 5.24 | 39.37 | 19.69 | 0.71 | 55.78 |

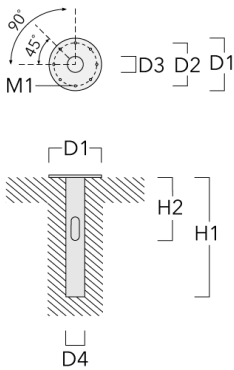

115-1837

LTM440 LED-FT



Optical Accessories

Light shield

| Description | Part ID |
|-------------|----------|
| LS180-[C60] | 159-0321 |