

115-9787

MRY224 LED - 600 mm

we-ef



Description

IP66. Class I. IK10. Marine-grade, all-aluminium construction. Pole section features anodised aluminium core. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens, UV-stabilised. Integral EC electronic converter in thermally separated compartment. DALI. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

Optional 2200 K version available. To be specified at time of ordering.

Optional 1-10V version available. To be specified at time of ordering.

| | |
|--------------------|-----------------------------------|
| Weight | 8.00 kg |
| Light distribution | asymmetric, side throw beam [S60] |
| Light source | LED-15W / 750 mA - 4000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 1 |
| Rated input power | 18 W |


| | |
|-------------------|--------|
| Rated lumens (lm) | |
| LED Lumen | 1261.3 |
| Total Lumen | 1261.3 |
| Ta | 25 |

| | |
|--------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 1978 |
| Total Lumen | 1978 |
| Tc | 25 |

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 06/09/2025

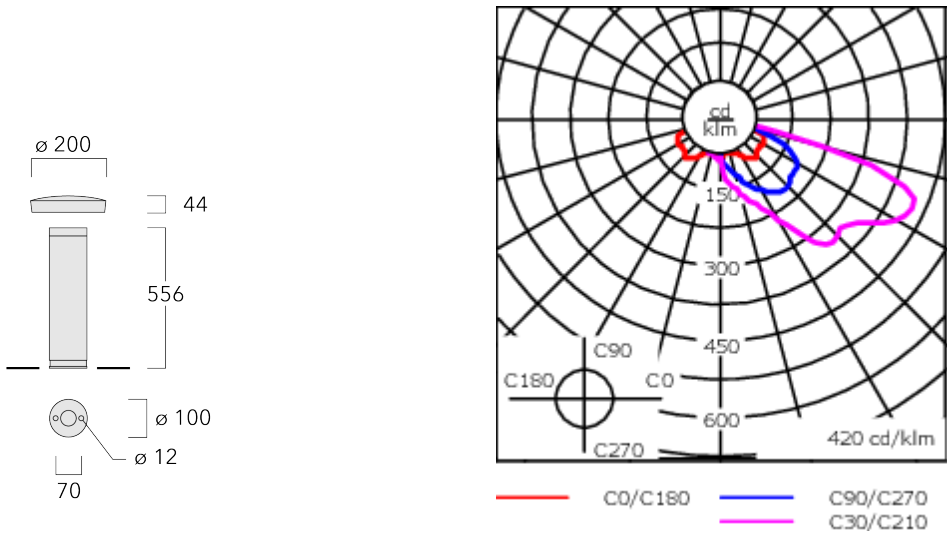

Specifications

Material description

| | |
|----------------------|--|
| Body | Marine-grade, all-aluminium construction. Pole section features anodised aluminium core |
| Lens | Polycarbonate, UV-stabilised |
| Colours | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div> |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS hardware |
| Ingress protection | IP66 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|--|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter, DALI |
| Power factor | > 0.9 |
| Surge protection | 10/10kV |

115-9787



MRY224 LED - 600 mm

Additional information

| | |
|-------------------------|----------------------|
| Lifetime | Ta=25° L70B50>50000h |
| ENERGY EFFICIENCY CLASS | E-F-D (Light source) |

Control

DALI interface

| Description | Part ID | Additional information | C |
|----------------|----------|--|----|
| DALI interface | 430-0013 | DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). Dali 2.0 -Application controllers and Input devices defined -Single-masters and multi-masters allowed -Event priorities defined -Separate addressing & grouping from control gear Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed! | 90 |

Mounting Accessories

Planted root

| Description | Part ID | D1 | D2 | D3 | D4 | H1 | H2 | Weight (kg) |
|-------------------|----------|----|----|----|-----|-----|-----|-------------|
| Planted root ESZ4 | 300-9090 | 55 | 45 | 70 | 100 | 400 | 350 | 3.50 |

