




**Description**

IP66. Class I. IK10. Marine-grade, all-aluminium construction. Pole section features anodised aluminium core. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate main lens, UV-stabilised. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

Available in 2200 K on request

|                           |                              |
|---------------------------|------------------------------|
| Weight                    | 10.80 kg                     |
| Light distribution        | asymmetric, side throw [S60] |
| Light source              | LED-15W / 750 mA - 3000 K    |
| CRI                       | 80                           |
| Power supply              | EC                           |
| LEDs                      | 1                            |
| Rated input power         | 18 W                         |
| <b>Rated lumens (lm)</b>  |                              |
| LED Lumen                 | 1180.9                       |
| Total Lumen               | 1180.9                       |
| Ta                        | 25                           |
| <b>Nominal Lumen (lm)</b> |                              |
| LED Lumen                 | 1852                         |
| Total Lumen               | 1852                         |
| Tc                        | 25                           |

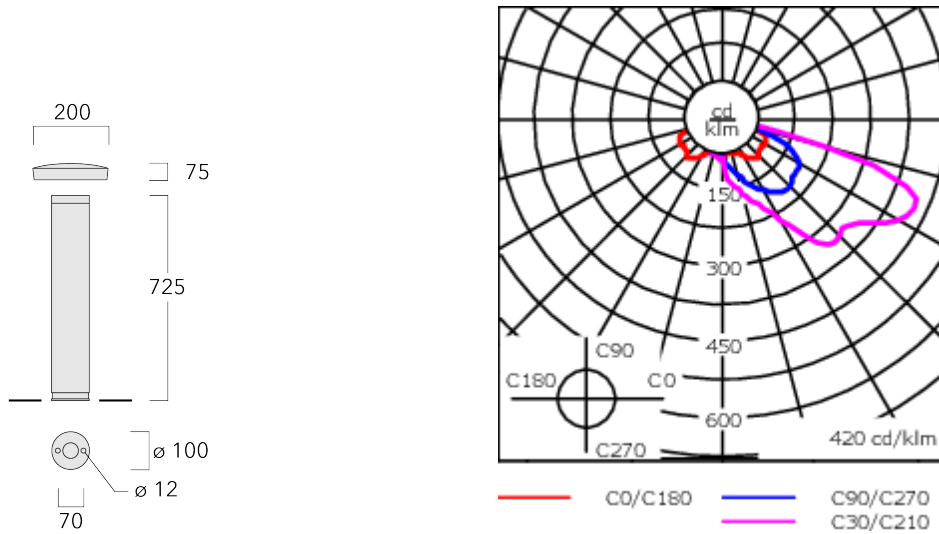

## Specifications

### Material description

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, all-aluminium construction. Pole section features anodised aluminium core  |
| Lens                 | Polycarbonate, UV-stabilised   |
| Colours              | <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> <span>RAL9004 Signal black</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #cccccc; margin-right: 5px;"></div> <span>RAL9006 White aluminium</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> <span>RAL9007 Grey aluminium</span> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #e0e0e0; margin-right: 5px;"></div> <span>RAL9016 Traffic white</span> </div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket  |
| Fasteners            | PCS hardware   |
| Ingress protection   | IP66   |
| Impact resistance    | IK10   |
| Corrosion resistance | 5CE+Primer   |

### Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | 10/10kV                          |

### Additional information

|          |  |
|----------|--|
| Lifetime | 11W - Ta=25° L70B50>50000h<br>15W - Ta=25° L70B50>60000h |
|----------|--|

**115-9806**

**MRY224 LED**

**we-ef**

## **Control**

### **1-10 V analogue dimming interface**

---

| Description                       | Part ID  | C  |
|-----------------------------------|----------|----|
| 1-10 V analogue dimming interface | 430-0011 | 90 |

---

---

## **DALI interface**

**WE-EF LIGHTING Pty Ltd**

6/13 Downard Street, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499

info.australia@we-ef.com - <https://we-ef.com/aus>

Subject to technical changes and errors. - Generated on 23/10/2024

| Description    | Part ID  | Additional information   | C  |
|----------------|----------|--|----|
| DALI interface | 430-0013 | DALI variant. The luminaire is equipped with a DT6 Dali driver (Dali 2.0). | 90 |

**Dali 2.0**


- Application controllers and Input devices defined
- Single-masters and multi-masters allowed
- Event priorities defined
- Separate addressing & grouping from control gear

Note: Mixing Dali 1 and Dali 2.0 drivers can cause problems because the addressing and the command scope has changed!

### Mounting Accessories

#### Planted root

| Description       | Part ID  | D1 | D2 | D3 | D4  | H1  | H2  | Weight (kg) |
|-------------------|----------|----|----|----|-----|-----|-----|-------------|
| Planted root ESZ4 | 300-9090 | 55 | 45 | 70 | 100 | 400 | 350 | 3.50        |

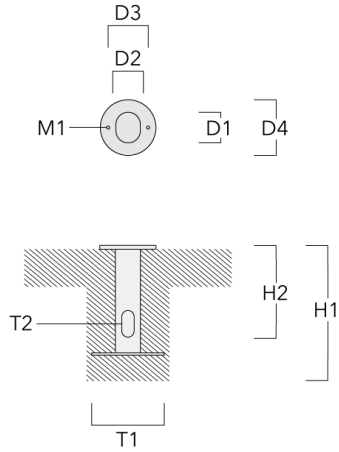

**115-9806**

**MRY224 LED**

**WE-EF LIGHTING Pty Ltd**

6/13 Downard Street, 3195 Braeside, Victoria

Phone: +61 3 8587 0444

Fax: +61 3 8587 0499

info.australia@we-ef.com

<https://we-ef.com/aus>

Subject to technical changes and errors.

Generated on 23/10/2024

**we-ef**

---

A Fagerhult Group Company