


#### Description

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Non-reflecting safety glass lens, hinged. Silicone CCG\_R\_ Controlled Compression Gasket. Catenary stay wire inclination angle: Maximum 10°.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC\_R\_ One LED Concept. Luminaire is factory-sealed and does not need to be opened during installation.

Maximum spacing for streetlighting applications depends on wattage and light distribution: 5.5 to 9 times the mounting height. Optional 2200 K version available. To be specified at time of ordering.

Weight	14.70 kg	
Light distribution	asymmetric, side throw [S70]	
Light source	LED-36/36W/36W / 700 mA -	
	3000 K	
CRI	80	
Power supply	EC	
LEDs	36	
Rated input power	79 W	
Nominal Lumen (lm)		
LED Lumen	290	
Total Lumen	10440	
Тј	85	
Rated lumens (Im)		
LED Lumen	240	
Total Lumen	8639.7	
Та	25	

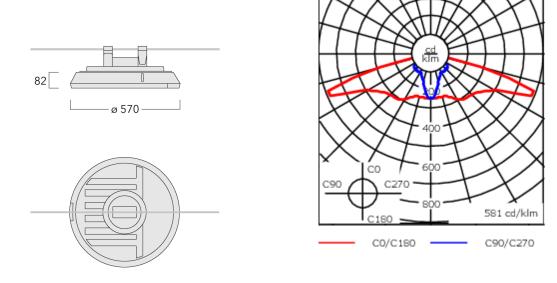

# Specifications Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Non-reflecting safety glass lens, hinged
Colours	RAL9004 Signal black
	RAL9007 Grey aluminium
	RAL7016 Anthracite grey
	RAL9016 Traffic white
Gasket	Silicone CCG <sup>®</sup> Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.074 m <sup>2</sup>

#### **Electrical description**

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

### Additional information

Lifetime 18=25 L90B10 > 90000n
--------------------------------

## 111-0705

**RFS540 LED** 

# Control

### **R2C Ready to Connect**

Description	Part ID
R2C Ready to Connect (top)	430-0019

