



Description

IP66. Class I. IK10. Marine-grade, all aluminum construction. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate lens, CAD-optimized indirect optics for superior illumination and glare control. Integral driver in thermally separated compartment. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.


Luminaire spacing up to 35 ft; ideal for pathway lighting applications.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.  
Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

|                    |                               |
|--------------------|-------------------------------|
| Weight             | 19.80 lb                      |
| Light distribution | rectangular, side throw [R65] |
| Light source       | LED-3/13W / 1400 mA - 2700 K  |
| CRI                | 80                            |
| Power supply       | electronic gear               |
| LEDs               | 3                             |
| Rated input power  | 14 W                          |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 520  |
| Total Lumen        | 1560 |
| Tj                 | 85   |

|                       |       |
|-----------------------|-------|
| Delivered lumens (lm) |       |
| LED Lumen             | 209.5 |
| Total Lumen           | 628.5 |
| Ta                    | 25    |

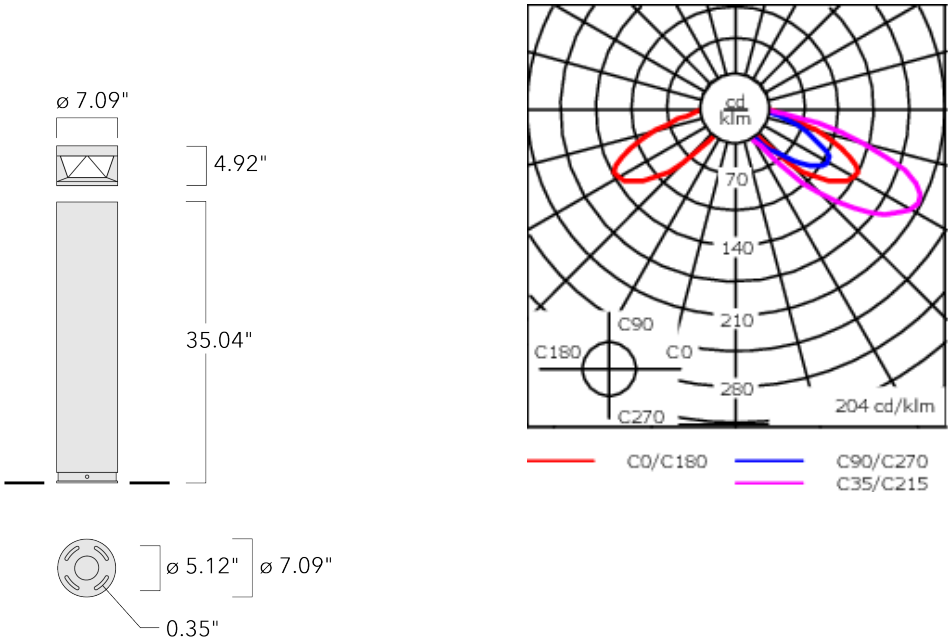

Specifications

Material description

|                      |                                                                                                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Body                 | Marine-grade all-aluminum construction                                                                                                                            |
| Lens                 | Polycarbonate                                                                                                                                                     |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket                                                                                                                       |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware                                                                                                                       |
| Ingress protection   | IP66                                                                                                                                                              |
| Impact resistance    | IK10                                                                                                                                                              |
| Corrosion resistance | 5CE                                                                                                                                                               |

Electrical description

|                  |                                                                                         |
|------------------|-----------------------------------------------------------------------------------------|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter                                                        |
| Surge protection | Integral 10kV Surge Protector                                                           |


Additional information

|            |                                                                                       |
|------------|---------------------------------------------------------------------------------------|
| Lifetime   | Ta=25°/40° L90B10 > 90000h                                                            |
| Lead Time  | This is a new product release and may have an extended lead time.                     |
| BUG Rating | Please see individual Spec Sheets for classification of Backlight, Uplight and Glare. |
| Listings   | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.                            |

Mounting Accessories

Planted root

| Description       | Part ID  | D1   | D2   | D3   | D4   | H1    | H2    | M1  | Weight (lb) |
|-------------------|----------|------|------|------|------|-------|-------|-----|-------------|
| Planted root ESV4 | 300-0461 | 5.71 | 5.12 | 4.01 | 4.25 | 15.75 | 13.78 | .31 | 15.50       |

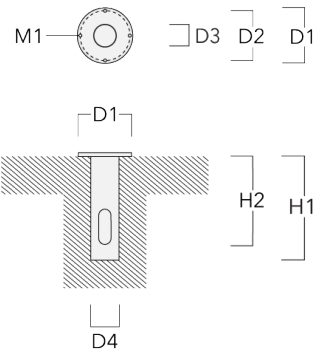

Optical Accessories

Light shield

| Description                   | Part ID  | H1   | Weight (lb) |
|-------------------------------|----------|------|-------------|
| LS180 KTY (factory installed) | 114-9185 | 2.59 | 0.04        |

