FLC201-TW LED TUNABLE WHITE



Description

IP66, Class III. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One factory installed flange plug M8 x 1.5. Cable length 4 ft. Integral driver in separate driver box (constant current), prewired; to be ordered separately. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board. Tunable White technology. DMX interface.


Maximum one internal optical accessory possible, to be specified at time of ordering.

Specify product with 7 Digit product code – Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately. Example: XXX-XXXX – 9004 (Black) + XXX-XXXX (Accessory 1)

Weight	1.10 lb
Light distribution	symmetric, medium beam [M]
Light source	LED-1/4W - 2200-6000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	5.5 W
Nominal Lumen (lm)	
LED Lumen	420
Total Lumen	420
Тј	85
Delivered lumens (lm)	
LED Lumen	321.1
Total Lumen	321.1
Та	25

WE-EF LIGHTING USA, LLC

FLC201-TW LED TUNABLE WHITE

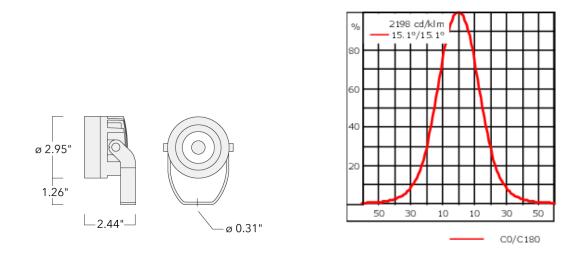

Specifications Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	RAL9004 Black
	RAL9007 Grey Metallic
	RAL9016 White
	RAL8019 Dark Bronze
Gasket	Silicone CCG [®] Controlled Compression Gasket
asteners	PCS Polymer Coated Stainless Steel Hardware
ngress protection	IP66
mpact resistance	IK07
Corrosion resistance	5CE
Windage	0.065

Electrical description

Driver / Ballast	120-277V DMX
Power factor	> 0.9

WE-EF LIGHTING USA, LLC



FLC201-TW LED TUNABLE WHITE

we-ef

Additional information

Lifetime

Ta=25° L90B10 > 90000h

FLC201-TW LED TUNABLE WHITE

Mounting Accessories

Ground spike EF


Description	Part ID	H1	Weight (lb)
EF1-M18 Ground spike	310-0045	10.70	0.80
S MM		H1	

FLC201-TW LED TUNABLE WHITE

we-ef

Junction box

Description
iction box



FLC201-TW LED TUNABLE WHITE

Optical Accessories

Linear spread lens

Description	Part ID	C1
10-180-FLC201-LED	139-2453	41.8



WE-EF LIGHTING USA, LLC 410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030 customersupport.usa@we-ef.com - https://we-ef.com/us Subject to technical changes and errors. - Generated on 08/15/2025 we-ef

FLC201-TW LED TUNABLE WHITE


we-ef

Honeycomb louvre

Description	Part ID	C1
IW-FLC201-LED	139-2454	48



Glare shield Description Part ID A C1 Weight (lb) ES-FLC201-LED 139-2455 59.5 75 0.24




FLC201-TW LED TUNABLE WHITE

we-ef

Snoot

Description	Part ID	А	C1	Weight (lb)
ET-FLC201-LED	139-2456	60	75	0.37



FLC201-TW LED TUNABLE WHITE

we-ef

Electrical Accessories

Gear box

GB200 R230x120 gear box (medium) TW 139-2632 75 120 229 200 Image: Second secon	Description	Part ID	А	В	C1	C2		
GB200 R230x140 gear box (large) 139-2633 95 140 255 230 SP10 TW	GB200 R200x120 gear box		75	120	229	200		
GB200 R230x140 gear box (large) 139-2633 95 140 255 230 SP10 TW		□ □						
GB200 R230x140 gear box (large) 139-2633 95 140 255 230 SP10 TW								
GB200 R230x140 gear box (large) 139-2633 95 140 255 230 SP10 TW		C2						
SP10 TW		B						
	GB200 R230x140 gear box (large SP10 TW) 139-2633	95	140	255	230		
		A						
		C1 C2						
		в						

WE-EF LIGHTING USA, LLC

we-ef

FLC201-TW LED TUNABLE WHITE

Description	Part ID	А	В	C1	C2
FLC201_210 Tunable White Gear Box	139-6978	3	4.7	9	7.9
μ			T IB]	
,		_		J	
	C1 C2]	
B					