

FLC210 TW LED [FP] TUNABLE WHITE FRAMING PROJECTOR



Description

Tunable White Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system.

IP66, Class I. IK05. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory installed LED circuit board. Tunable White technology. DMX interface.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX - 9004 (Black)  
+ XXX-XXXX (Accessory 1)

|                    |  |
|--------------------|--|
| Weight             | 8.80 lb  |
| Light distribution | symmetric Framing-Projector [FP]<br>- max aperture angle |
| Light source       | LED-FT-10W / 250mA -<br>2200-6000 K                      |
| CRI                | 80   |
| Power supply       | electronic gear  |
| LEDs               | 1  |
| Rated input power  | 12 W   |

|                       |       |
|-----------------------|-------|
| Delivered lumens (lm) |       |
| LED Lumen             | 514.9 |
| Total Lumen           | 514.9 |
| Ta                    | 25    |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 1440 |
| Total Lumen        | 1440 |
| Tc                 | 25   |

FLC210 TW LED [FP] TUNABLE WHITE FRAMING PROJECTOR

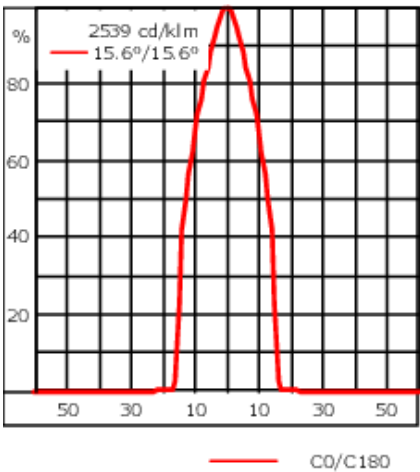

Specifications  
Material description

|                      |   |
|----------------------|---|
| Body                 | Marine-grade, die-cast aluminium alloy  |
| Lens                 | Safety glass lens   |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket   |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware   |
| Ingress protection   | IP66  |
| Impact resistance    | IK05  |
| Corrosion resistance | 5CE   |

Electrical description

|                  |                        |
|------------------|------------------------|
| Driver / Ballast | DMX (separate gearbox) |
| Power factor     | > 0.9                  |

**FLC210 TW LED [FP] TUNABLE WHITE FRAMING PROJECTOR**

**Additional information**

|          |  |
|----------|--|
| Lifetime | Ta=25°/40° L70B50 > 50000h                                 |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

FLC210 TW LED [FP] TUNABLE WHITE FRAMING PROJECTOR

Electrical Accessories

Gear box

| Description   | Part ID  | A    | B    | C1   | C2   | Weight (lb) |
|---|----------|------|------|------|------|-------------|
| GB200 R200x120 gear box<br>(medium) 120-277V, 0-10V | 139-2526 | 2.95 | 4.72 | 9.02 | 7.87 | 1.05        |




|                                 |          |    |     |     |     |      |
|---------------------------------|----------|----|-----|-----|-----|------|
| GB200 R230x140 gear box (large) | 139-2527 | 95 | 140 | 259 | 230 | 1.20 |
|---------------------------------|----------|----|-----|-----|-----|------|



FLC210 TW LED [FP] TUNABLE WHITE FRAMING PROJECTOR


| Description                       | Part ID  | A | B   | C1 | C2  | Weight (lb) |
|-----------------------------------|----------|---|-----|----|-----|-------------|
| FLC201_210 Tunable White Gear Box | 139-6978 | 3 | 4.7 | 9  | 7.9 |             |

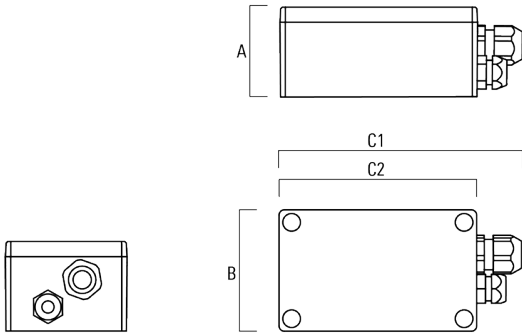


Mounting Accessories

Pole clamp PC

| Description                                 | Part ID  | D1       | Weight (lb) |
|---|----------|----------|-------------|
| PC1 76-89/60 Pole clamp, single (Ø 3"-3.5") | 139-2702 | 3.0-3.50 | 2.20        |

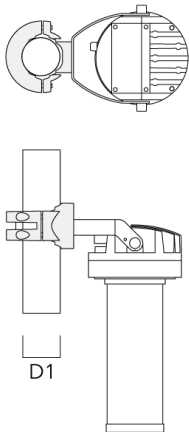

|   |          |          |      |
|---|----------|----------|------|
| PC2 76-89/60 Pole clamp, double (Ø 3"-3.5") | 139-2703 | 3.0-3.50 | 2.20 |
|---|----------|----------|------|

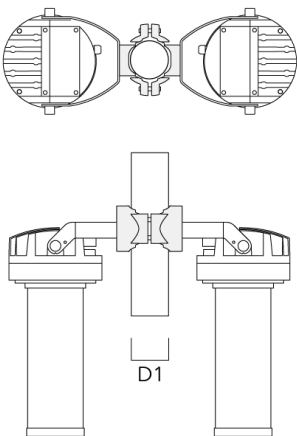


FLC210 TW LED [FP] TUNABLE WHITE FRAMING PROJECTOR

| Description                                    | Part ID  | D1        | Weight (lb) |
|--|----------|-----------|-------------|
| PC1 82-109/60 Pole camp, single (Ø 3.25"-4.3") | 139-2704 | 3.20-4.30 | 2.40        |




|  |          |           |      |
|--|----------|-----------|------|
| PC2 82-109/60 Pole clamp, double (Ø 3.25"-4.25") | 139-2705 | 3.20-4.30 | 2.40 |
|--|----------|-----------|------|

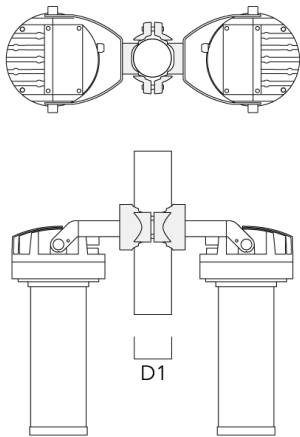


FLC210 TW LED [FP] TUNABLE WHITE FRAMING PROJECTOR

| Description                                      | Part ID  | D1       | Weight (lb) |
|--|----------|----------|-------------|
| PC1 102-114/60 Pole clamp, single<br>(Ø 4"-4,5") | 139-2706 | 4.0-4.50 | 2.65        |

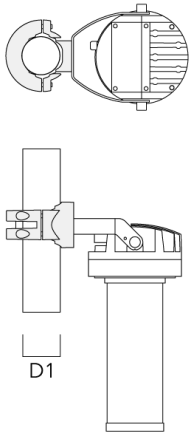


|  |          |          |      |
|--|----------|----------|------|
| PC2 102-114/60 Pole clamp, double<br>(Ø 4"-4.5") | 139-2707 | 4.0-4.50 | 2.65 |
|--|----------|----------|------|

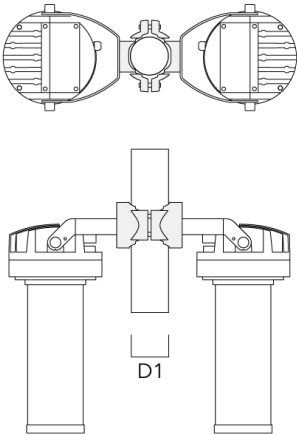



FLC210 TW LED [FP] TUNABLE WHITE FRAMING PROJECTOR

| Description   | Part ID  | D1       | Weight (lb) |
|---|----------|----------|-------------|
| PC1 114-133/60 Pole clamp, single<br>(Ø 4.5"-5.25") | 139-2708 | 4.5-5.25 | 3.10        |

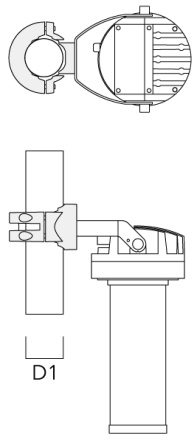

|   |          |          |      |
|---|----------|----------|------|
| PC2 114-133/60 Pole clamp, double<br>(Ø 4.5"-5.25") | 139-2709 | 4.5-5.25 | 3.10 |
|---|----------|----------|------|

