


#### Description

IP66, Class I. IK09. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. PMMA main lens. Integral EC electronic converter in thermally separated compartment. DALI. CAD-optimised indirect optics for superior illumination and glare control. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

Weight	7.80 kg
Light distribution	rectangular [R50]
Light source	LED-FT-12W / 350 mA - 2700 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	14 W
Rated lumens (lm)	
LED Lumen	1491.8
Total Lumen	1491.8
Та	25
Nominal Lumen (lm)	
LED Lumen	1920
Total Lumen	1920
Тс	25

## 115-1887 ZAT440-FT LED

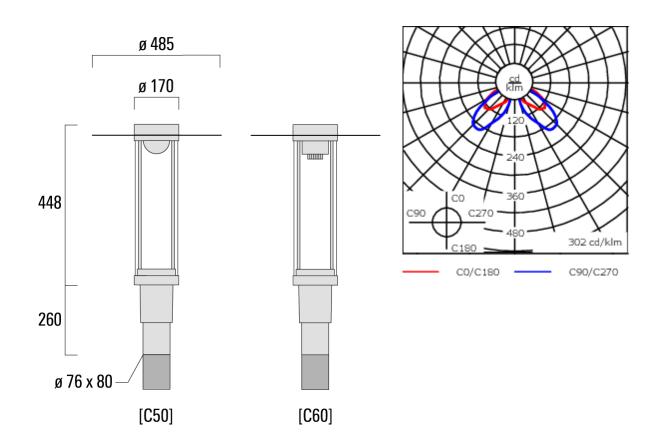

## Specifications Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	PMMA
Colours	RAL9004 Signal black
	RAL9006 White aluminium
	RAL9007 Grey aluminium
Gasket	Silicone CCG <sup>®</sup> Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP66
Impact resistance	IK09
Corrosion resistance	5CE+Primer
Windage	0.160 m <sup>2</sup>

# 115-1887

### ZAT440-FT LED



#### **Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter. DALI
Power factor	> 0.9
Surge protection	In-pole surge protection SP10 device supplied. Please refer to WE-EF installation instructions for details. Use suffix +A for Integral surge protection.

#### **Additional information**

Lifetime	Ta=40° L70B50 > 50000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

#### 115-1887

ZAT440-FT LED

## we-ef

## **Optical Accessories**

## Light shield

Description	Part ID	H1
LS180-[C60]	159-0321	120



ZAT440-FT LED

## **Mounting Accessories**

## Wall and pole brackets RZ

Description	Part ID	C1	D1	D2	$D \times L1$	M1	Weight (kg)
RZO-400 Wall bracket, single	115-1324	277	231	195	76 x 80	12	3.50
D2 M1	D1	C1		— — D x	L1		
RZ2-400 Pole bracket, double	115-1323	258			76 x 100		4.90

