

## FLC301 Surface mounted

**Description**

IP66. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control.

Optical accessories are factory-installed. To be specified at time of ordering.

4W / 120V mains voltage version, ON-OFF Class I. Non-dimming.

6W / 24V DC low voltage version available upon request, ON-OFF Class III. Non-dimming.

Dimmable version can only be done with a remote driver (120-277V)

347V remote driver on request.

Weight	0.80 lb
Light distribution	symmetric, very narrow beam, 'sharp cut-off' [VNS]
Light source	LED-1/4W / 350 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	5 W


**Nominal Lumen (lm)**

LED Lumen	490
Total Lumen	490
T <sub>j</sub>	85

**Delivered lumens (lm)**

LED Lumen	411.6
Total Lumen	411.6
T <sub>a</sub>	25

## FLC301 Surface mounted

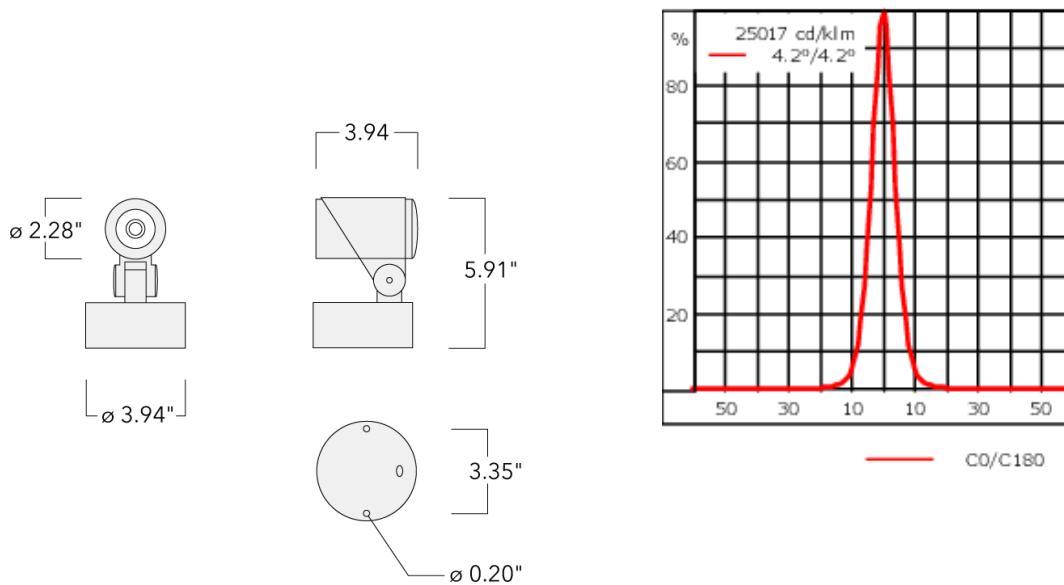

## Specifications

## Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens
Colors	<div style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 5px;"></div> RAL9004 Black <div style="display: inline-block; width: 15px; height: 15px; background-color: #808080; margin-right: 5px;"></div> RAL9007 Grey Metallic <div style="display: inline-block; width: 15px; height: 15px; background-color: #F0F0F0; margin-right: 5px;"></div> RAL9016 White <div style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 5px;"></div> RAL8019 Dark Bronze
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE
Windage	0.107 ft <sup>2</sup>

## Electrical description

Power supply	120V AC/50-60 Hz (24V DC available upon request)
Driver / Ballast	Integral EC electronic converter (ON/OFF only)
Power factor	>0.9

**FLC301 Surface mounted****Additional information**

---

Lifetime	Ta=25°/40° L90B10 > 90000h
Dimming	0-10V Dimming with Remote Driver only
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.


---

## FLC301 Surface mounted

## Mounting Accessories

## Short post EM

Description	Part ID	A	B	C1	D1	Weight (lb)
Short post EM1 for FLC301	145-9200	26	200	100	160	1.10

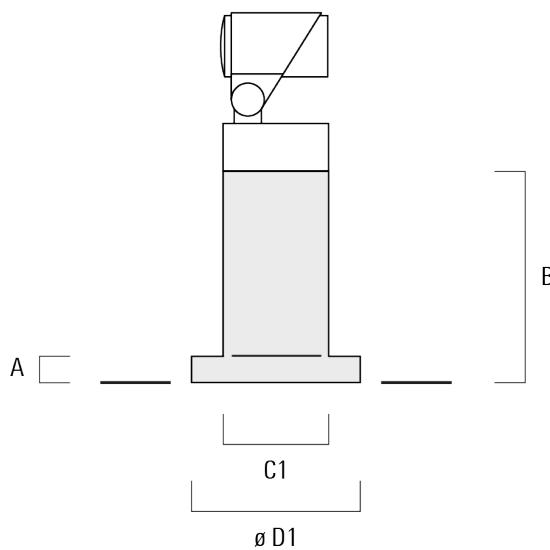


## FLC301 Surface mounted

**Optical Accessories****Linear spread lens**


---

Description	Part ID	C1
Linear spread lens IO-180	145-7229	42.5



**FLC301 Surface mounted****Wallwash lens**


Description	Part ID	C1
Wallwash lens I0-20	145-7230	42.5



C1

**Honeycomb louvre**

Description	Part ID	C1
Honeycomb louvre IW	145-7231	42.5




C1

## FLC301 Surface mounted


## Glare shield

Description	Part ID	A	C1
Glare shield ES	145-7232	20.5	58



## Snoot

Description	Part ID	A	C1
Snoot ET	145-7233	22.5	58



**FLC301 Surface mounted****Control****ON-OFF, 24VDC low voltage version**

Description	Part ID
24VDC low voltage version	0025