





Description

IP67, Class I. Class II on request. IK09. Marine-grade, all aluminium construction. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. PMMA main lens. Linear PMMA LED lens. 1.2 m connecting cable, UV stabilized, PVC free. Luminaire is factory sealed and does not need to be opened during installation and can be tilted up to 180°.

Separate LED driver with DALI interface.

Weight	1.20 kg
Light distribution	symmetric linear, wide beam [LB/IW]
Light source	LED-16/10W / 225 mA - 2700 K
CRI	80
Power supply	EC
LEDs	16
Rated input power	13 W
Nominal Lumen (lm)	
LED Lumen	90
Total Lumen	1440
T _j	85
Rated lumens (lm)	
LED Lumen	26.6
Total Lumen	425.8
T _a	25

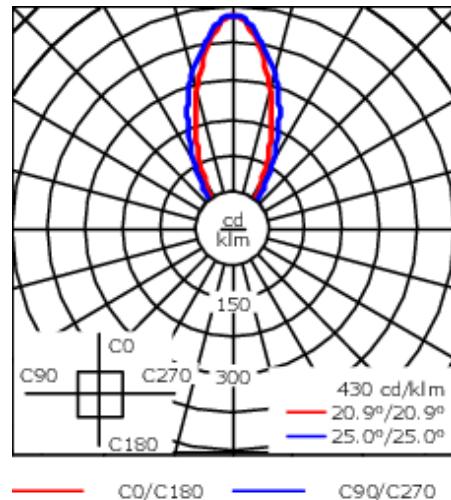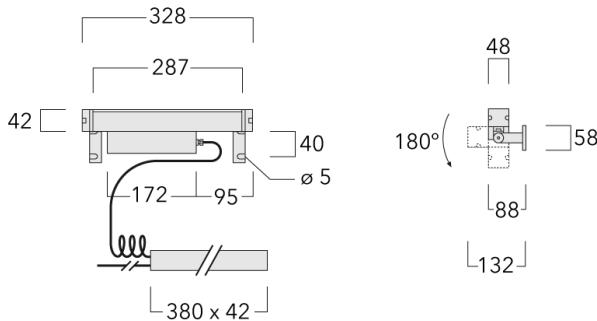

Specifications

Material description

Body Marine-grade, all-aluminium construction

Lens PMMA

Colours RAL9004 Signal black

RAL9006 White aluminium

RAL9007 Grey aluminium

RAL7016 Anthracite grey

RAL9016 Traffic white

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware

Ingress protection IP67

Impact resistance IK09

Corrosion resistance 5CE

Electrical description

Power supply 220-240V / 50-60 Hz

Driver / Ballast Separate LED driver with DALI Interface

Additional information

Lifetime $T_a=25^\circ L90B10 > 90000h$

Energy efficiency class D (Light source)