



### Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® gasket. Safety glass lens. One cable entry, optional T-QPD connector for through wiring available on request. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during installation.

Includes cable connector, for cable 2-12 mm. +/- 10° adjustable to compensate for sloping catenary systems.

Other standardised housing lengths available on request.

Optional 2200 K version available. To be specified at time of ordering.



|                    |                              |
|--------------------|------------------------------|
| Weight             | 3.90 kg                      |
| Light distribution | symmetric, wide beam [B]     |
| Light source       | LED-12/24W / 700 mA - 4000 K |
| CRI                | 80                           |
| Power supply       | EC                           |
| LEDs               | 12                           |
| Rated input power  | 27 W                         |

### Nominal Lumen (lm)

|                |      |
|----------------|------|
| LED Lumen      | 310  |
| Total Lumen    | 3720 |
| T <sub>j</sub> | 85   |

### Rated lumens (lm)

|                |        |
|----------------|--------|
| LED Lumen      | 228    |
| Total Lumen    | 2735.4 |
| T <sub>a</sub> | 25     |

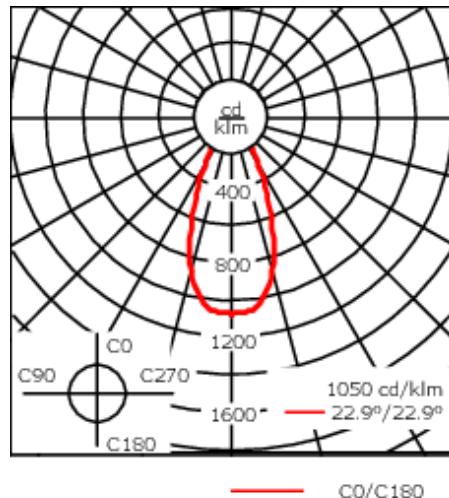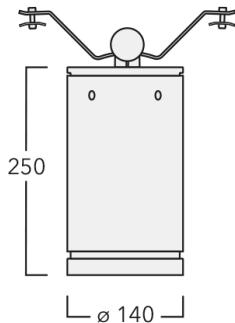

## Specifications

### Material description

|                      |   |
|----------------------|---|
| Body                 | Marine-grade, all aluminium construction  |
| Lens                 | Safety glass lens   |
| Colours              | <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span> <br/>RAL9004 Signal black       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #a9a9a9; border-radius: 50%;"></span> <br/>RAL9007 Grey aluminium       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #333333; border-radius: 50%;"></span> <br/>RAL7016 Anthracite grey       </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #f0f0f0; border-radius: 50%;"></span> <br/>RAL9016 Traffic white       </div> </div> |
| Gasket               | Silicone CCG® Controlled Compression Gasket   |
| Fasteners            | PCS Polymer Coated Stainless Steel Hardware   |
| Ingress protection   | IP66  |
| Impact resistance    | IK07  |
| Corrosion resistance | 5CE   |
| Windage              | 0.0376 m <sup>2</sup>   |

### Electrical description

|                  |                           |
|------------------|---------------------------|
| Driver / Ballast | Standard. DALI on request |
| Power factor     | > 0.9                     |


### Additional information

|          |                                     |
|----------|-------------------------------------|
| Lifetime | T <sub>a</sub> =25° L90B10 > 90000h |
|----------|-------------------------------------|

## Optical Accessories

### Linear spread lens

| Description               | Part ID  | Additional information  | C1  |
|---------------------------|----------|---|-----|
| Linear spread lens IO-180 | 134-2000 | Broadens light distribution in one plane only. Ideally suitable for [M][EE][EES]. Does not fit in combination with [B] lens.<br>A maximum of one internal optical accessory. Internal component, factory installed. | 130 |



**Honeycomb louvre**

| Description         | Part ID  | Additional information  | C1  |
|---------------------|----------|---|-----|
| Honeycomb louvre IW | 134-2002 | Honeycomb louvre, matt black Teflon® coated. For luminaires equipped with [B][M] light distribution.<br>A maximum of one internal optical accessory. Internal component, factory installed. | 103 |

